



0000000000 00 0000 0000000 000000

**11.52 00000000 0000000 0000000 0000000 0000000 0000000 0000000000:**

11.52 00000000 0000000 0000000 0000000 0000000 000 00000 00 000 00 [5 00000 000000000 0000000-000000](#) 00  
0000000 0000000 0000000 00 000 2 000000000 (1.52 00000) 00000000 00 000 000000  
0000000 0000000 0000 00 0000000 00 0000000 00000 00000 00000 00000 00 0000 00000 00 000000000 00 00000 0000000  
000000 0000, 0000000 0000000 00 0000000 00 0000000 0000, 00000 0000 00 00000000 00 0000:

00000: 00000000 3000 \* 5000 00000, 00000 300 \* 300 00000, 00000 00 0000000000 00000 00 000000000 00000 00 00000  
0000

000000: 000000 substrates 5 00000, 6 00000, 8 00000, 10 00000, 12 00000, 15 00000, 000 00 00000 00,  
0000000 000000 0.8 9 00000, 1.52 00000, 2.28 00000, 0000

000000 00 00000000: 0000000 0000000 0000000, 00 00000 000000000 00000000 0000000 0000000, 00 0 0000000, 00000 etched  
0000000, 000000000 000000000 0000000, 00000

000000000 00000000 00000000 00000000 0000 00000 00 0000000:

000000000 00000000 00000000 00000000 00000000 0000 000000 00000000 00000000 0000 000000 00 0000 000000, 00000000  
000000000 00000000 00000 00 0000 00 00 000000 - 00000 00 0000000000 00 00000000 0000 00 000000000 000000000 0000000  
000000000000 00000000 00000000 00000000 0000 000000 00 00000000 00000000 0000 000000 00000000000000 0000 0000000000  
00000 00 00000 00:

0000000 00000 / 0000000000

00000

0000 00000000

000000 000000000000 000000000000, 00000000 00 skylights

00 000000000 000000000000 000000000000, 00000000 00 00000000

000000000 000000000 00 00000-00000 00000000, 00000000 00 0000

**Balustrades / 000000**


000000000 000000 000000000000 0000 000000000000 / 00000000 000000000000

000000000 00000 / 000000 000000

0000000000000 0000000 00000, 00000000000, 00000 00000 000000 00 00000 00000000 0000000 00 00000



□□□ □□ □□□□□□ □□□□□ □□□□□□ □□ □□□□□□ **11.78** □□□□□□ □□□□□□ □□□□□□ □□□□□□ □□□□□□ □□□ □□□□□□;

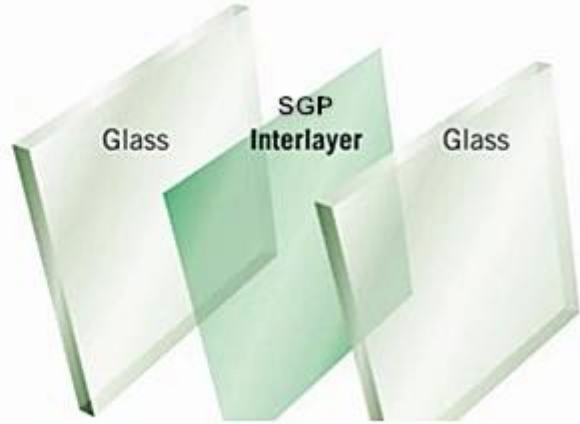


Performance data

Material	SGP	PVB	Standard
Performance			
Density (g/cm <sup>3</sup> )	0.95	1.07~1.08	ASTM D-792
Coefficient of linear expansion ( °C <sup>-1</sup> )	10~15x10 <sup>-5</sup> (-20°C ~32 °C)	4x10 <sup>-4</sup>	ASTM D-696
Tensile strength (Mpa)	34.5	20	ASTM D-638
Tear strength (Tear energy) (MJ/m <sup>3</sup> )	50	10-15	ASTM D-638
CSS (Mpa)	>20.7		Du Pont
Elongation (%)	400	275 (ASTM D-412)	ASTM D-638
HDT @ 66 PSI	43°C		ASTM D-696
Haze	<2%	<2	
YID %	<2.5	10-15	(interlayer)
Refractive index	1.5	1.47~1.5	
UV cutoff wavelength (nm)	310	380	
UV screening (%) 3C+0.38+3C	99.98	99.98	


SGP Interlayer is a high performance interlayer that provides superior strength and safety performance. It is designed to meet the most demanding applications and is available in a variety of thicknesses and colors.



Laminated Glass with  
SGP Interlayer

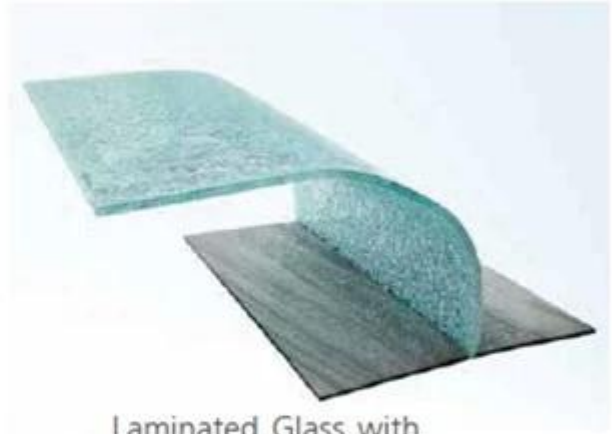

Laminated Glass with  
PVB Interlayer

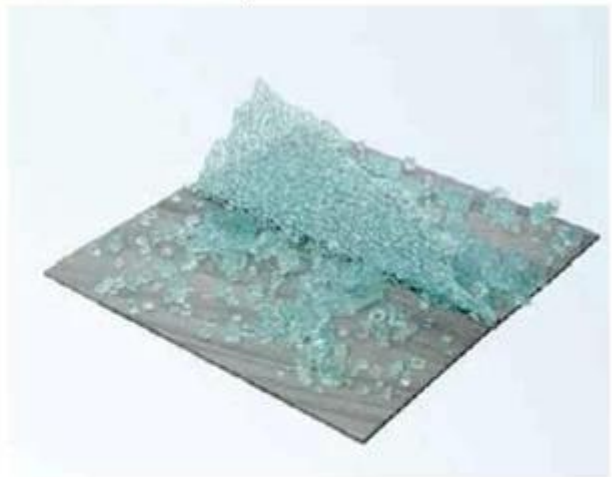

Tempered Glass

□□□□□□ □□□□□□ □□□ □□□□□□ □□□□□□□□□□



□□□□□ □□□□□ □□ □□□□ □□□□□□ □□□□□□

