□□□□ □□□□□□□□ □□□ 3mm AR □□□□□□□□ □□□□□□ □□□□□ □□□□□□□□□□□□□□

□. □□. □□□□ □□ □□□□ □□□

□□□□□□ □□□□□□□□ □□□□□, □□ □□□ AR □□□□□, □□□-□□□□□□□□ □□□□□, □□□□□ □□□□□□□ □□□□□□ □□□□□□□□□□□□□, □□□□ □□□□□□□□□ □□ □□□□ □□ □□□, □□□□□□ □□□□□ □□□□□□ sputtering magnetron □□□□□□ □□ □□□□□ □□□-□□□□□□□□□□□□□□□□ □□, □□□□□ □□□□□□□□, □□□ □□□□□□□□□□□ □□ □□□□□□ □□□□□ □□□□□□ □□□ □□□□□ □□□□ □□ □□□ □□□□□ □□, □□ □□□□□ □□□□□□ □□ □□□ □□ □□□□ □□□ □□□ □□□□□ □□ □□ □□□□ □□□□□ □□ □□□□□ □□□□ □□ □□□ □□□□□□□ □□ □□□ □□ □□□□□ □□□□□ □□□

3mm AR □□□□□□ □□□□□ □□□□□□□

• □□□□□ □□ 96% □□ □□□□ □□ (□□□□□□: 99.5%) 89% □□□□□□□ □□ □□□□□, □□ □□ □□□□□□ □□ □□□□ □□□□□□□□ □□□□ □□□
□□□ □□□□□□□ □□□□□□□□ 95% □□ □□□□ □□□□□□, □□□□□ □□□ □□□ □□□□□□ □□□□□□ □□ LCD □□, □□□□ □□□□□ □□ □□□ □□ □□ □□□□

• □□□□□ □□ 8% □□ □□ 3 □□□□ □□□□□ □□□□□, 2% □□ □□□□ □□□ □□□ (□□□□□□□: 0.2%), □□□□□□□ □□□ □□ □□□□□ □□□ □□□□□□□ □□ □□□□ □□□ □□□□□ □□ □□□□ □□ □□ □□□□ □□□□□□ □□□ □□ □□□□ □□□ □□□□□□□□□

• □□□□ □□□□□□□□□□ □□□□□□□□ < 3%, □□□□□□□ □□□ □□ □□□□□ □□□□□□□□□ □□□□ □□□□□ □□ □□□□□□ □□□□□□□

• □□□□□□□□ □□□□□ □□□□□□□□ □□ hardness≥7H, □□□□□□□□ □□□□□□□□ □□□□□□□□, □□□□ □□ □□□□□ □□□□□□□□, □□□□□□ □□□□□□□□, □□ □□□ □□□□□□ □□□□, □□□□ □□□□□□ □□□□□□□ □□ □□□□□□ □□□ □□□□ □□□□□□ □□ □□□□□□□□□□ □□□□□

3 □□□□ □□□□□□ □□□□□□□□ □□□□□ □□□□□□□□□

□□□□: 1200 □□□□ * 1600 □□□□, □□□□ □□□□ □□□□□□□: 200 □□□□ * 200 □□□□, □□□□ □□ □□□□□□□□ □□□□ □□ □□□□□□□ □□□□ □□ □□□□ □□

□□□□□ □□□□□□: □. □□. □□□□□□ □□□ □□□□□□ □□ □□□□ □□, □□□□□□ □□ □□□□□□ □□□□□□□□ □□□□□□, □□□ □□□□□□□□□□, □□□□ □□□ AR □□□□□, □□□□□□ □□□□□□□□ □□ □□□□ □□ □□□□□ □□□□□□□□□

□□□□□□□□ □□□□ □□□□□ □□ □□□□□□ □□□□□□□□ □□□□□

Parameters	Clear float glass	Single Sided with double AR coating	Double Sided with double AR coating	Double Sided with double AR coating
Color	transparency	bluish violet	natural color	natural color
Optical curve	---	V	W	W
Transmittance	≤86%	≥93%	≥94.5%	≥98%
Reflectivity (ultraviolet ray)	≥8.4%	≤5.2%	≤4.8%	≤ 1%
Application	low-end product	middle-end di splay panel	high-end display panel	high-end display panel
scratch resistance	≥8H			
abrasive resistance	Use eraser , under 250G pressure, 200 timnes, film no change			
moisture resistance	Fahrenheit120°±4°,24hour			
high-temperature resistance	650°C,Full toughened,Semi-tempered,film no change			
solubility	concentration50G/L-NaCl, 35°C, film no change			
acid resistance	concentration10%-HCL, indoor temperature,24hour, film no change			
Salt resistance	concentration10%-NaOH,60°C,5minutes, variation of transmissivity | ΔT | ≤4%			
ARglass sputtering vacuum coating	high transparency and beauty,low reflective, easy to clearn, non-ageing, nondeformable, Scratch Resistance, and other advantage.			

3 □□□□ □□ □□□□□□□□ □□□□□ □□□□□□□□□

3 □□□□ □□□□□□ □□□□□□□□ □□□□□ □□□□□□□□ □□□□□□□, □□□□ □□ LCD □□□□, □□□□□□ □□□□, □□□□□□, □□□□□□□□ □□□□□□□□ □□ □□ □□□□□ □□□□ □□ □□□ □□□□ □□□ □□□□□, □□□□ □□□ □□□□□ □□□□, □□ □□□□□□□, □□□□ □□□ □□□□□ □□□□□□ □□□□□□□□□ □□□□ □□, □□□□□□□□ □□□□ □□□□□, □□ □□□□ □□□□□□□□□□□□□ □□□□□□□□ □□ □□□□ □□□ □□□□□□□□ □□ □□ □□□□□ □□ □□□ □□ □□ □□□□□□□□□ □□□□□□ □□□□□□ □□□ □□□□□, □□□□□ □□□□□□□□ □□□□□□□, □□□□□□□□□ □□□□□□□ □□□□□, □□□□□ □□□□□□□□ □□□□□ □□□□ □□ □□□ □□□ □□ □□□□□ □□□□□□□ □□□□ □□ □□□, □□□□

□□□□□□ □□□□□□□□ □□□□□ □□□□ □□□□□□ □□□ □□□□□

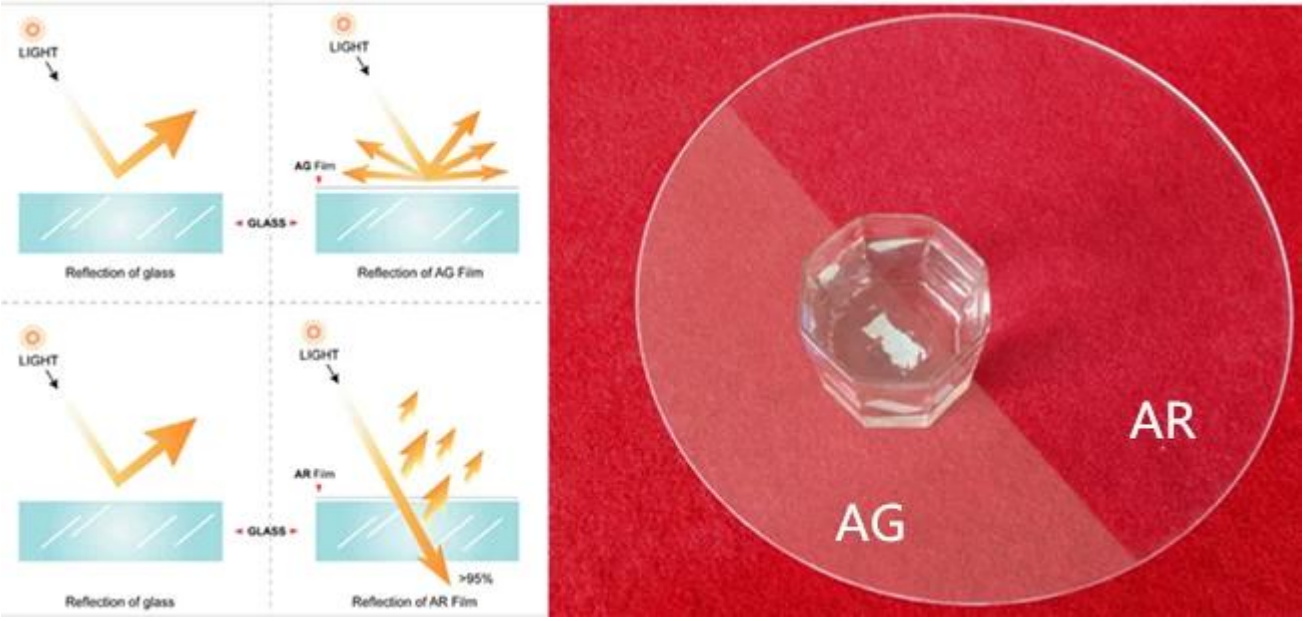
LIGHT
GLASS
Reflection of glass
LIGHT
AG Film
GLASS
Reflection of AG Film
LIGHT
GLASS
Reflection of glass
LIGHT
AR Film
GLASS
>95%
Reflection of AR Film
AR
AG

□□□□□□ □□□□□□□□ □□□□□ □□□□□□□ □□ □□□ □□□□□ □□□□ □□□□□ □□□□□ □□□□

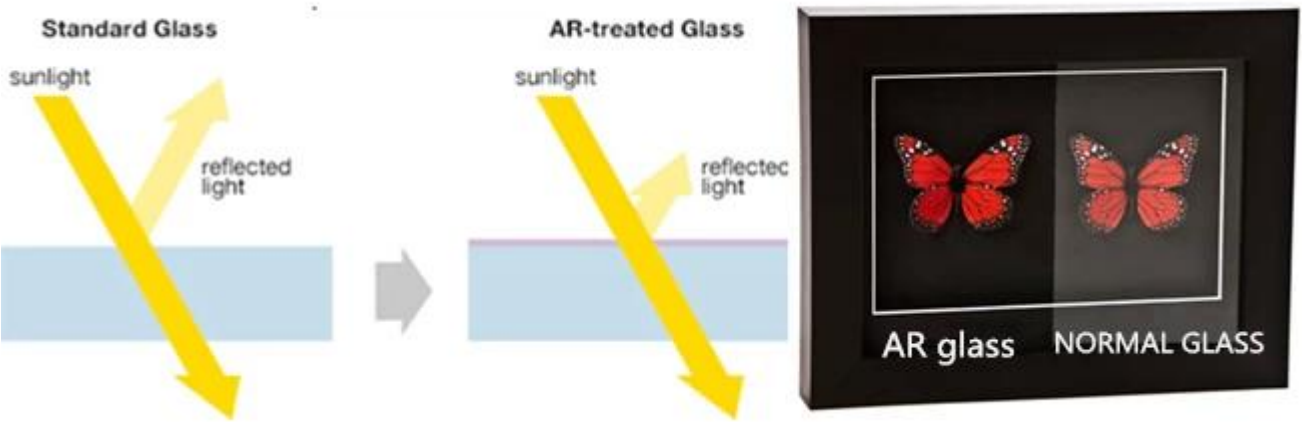
Standard Glass
sunlight
reflected light
AR-treated Glass
sunlight
reflectec light
AR glass
NORMAL GLASS

□□□ □□□□□□□□□ □□□□ □□□□□□□ □□ □□□□□□□ □□□ □□ □□□ □□:

□□□□ □□□□□□□□ **3** □□□□ □□□□□□ □□□□□□□□ □□□□□ □□ □□□□□ □□□□ □□ □□□□□□□ □□**:**