

□□□□ □□□□□□□□ □□ **3mm AR** □□□□□□□□ □□□□□□ □□□□ □□□□□□□□□□□□□□□□

□ . □□ . □□□□ □□ □□□□ □□□

[illegible]


3mm AR ☐☐☐☐☐☐ ☐☐☐☐☐ ☐☐☐☐☐☐

- [illegible]


3 □□□□ □□□□□□ □□□□□□□□ □□□□□ □□□□□□□□□□

圖面比例尺：1200 毫米 * 1600 毫米，圖面尺寸：200 毫米 * 200 毫米，圖面內應註明圖名、圖號、繪圖人、校對人、日期等。

[illegible][illegible]

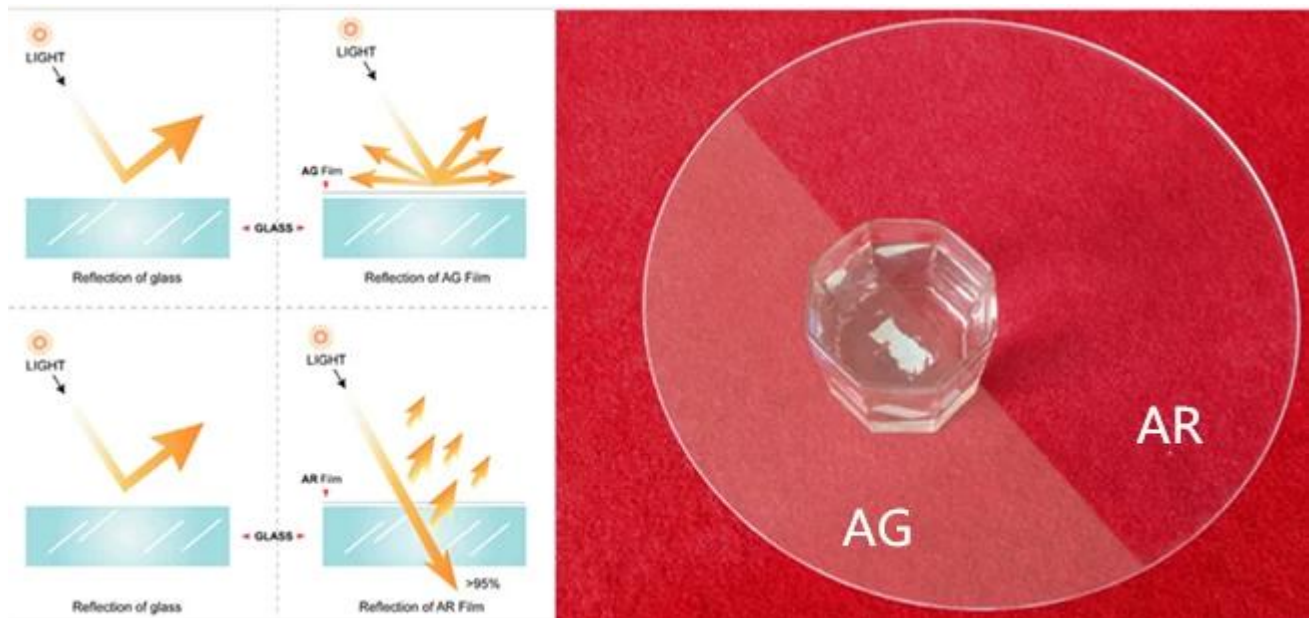

표준유리 반사율 4% 정도인 반면, AG 유리 반사율은 0.1% 이하로 낮아져서 눈부심을 줄여줍니다.

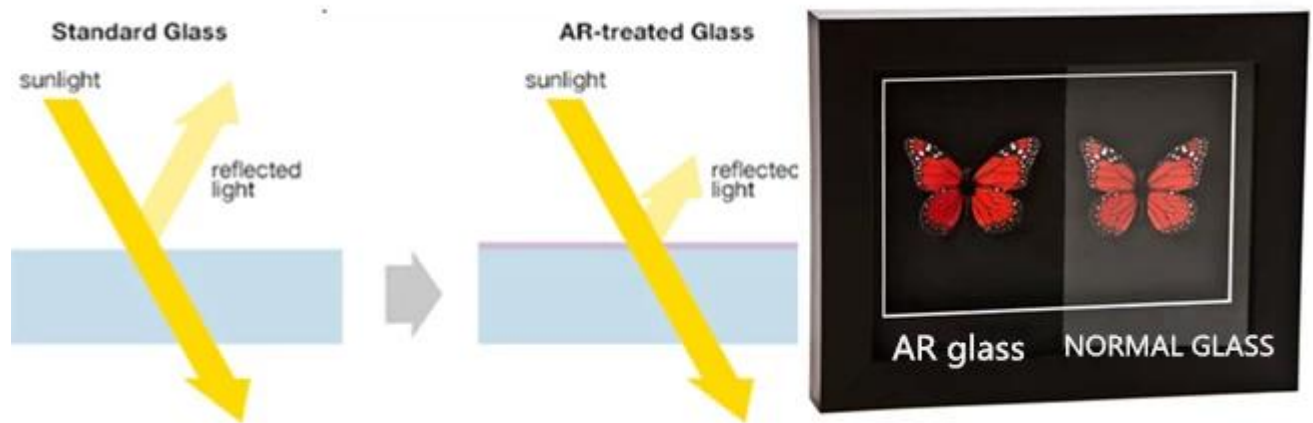

표준유리 반사율 4% 정도인 반면, AG 유리 반사율은 0.1% 이하로 낮아져서 눈부심을 줄여줍니다.



0000 00000000 3 0000 000000 00000000 00000 00 000000 0000 00 00000000 00:

