

8MM

8MM

toughend annealed 600 ° C compensating

8MM

3-5times annealed 95Mpa

8MM

obtuse alveolate granules toughening

8MM

320°C 250 annealed 20 100

8MM

8MM	8MM	8MM	annealed 8MM
8MM	8MM	8MM	8MM
8MM	152Mpa	/	30-90Mpa
8MM	250-320°C	100	20-100
8MM	95Mpa	24-69Mpa	/
8MM	8MM-8MM	8MM-8MM	8MM

8MM

8 3000 * 8000 150 * 300


ASTM1048 鋼 鋼板鋼 鋼板鋼 鋼板

鋼板鋼 GB 9963-1998 鋼板鋼 鋼板鋼 鋼板

鋼板鋼 GB 17981-1999 鋼板 鋼板 鋼板鋼 鋼 鋼板鋼 鋼 鋼板鋼 鋼板

鋼板 鋼板鋼 鋼板 鋼 鋼 鋼板鋼 鋼板鋼 鋼板鋼 (CCC), 鋼板鋼, 鋼板鋼

8 鋼板 鋼板 鋼板鋼 鋼板

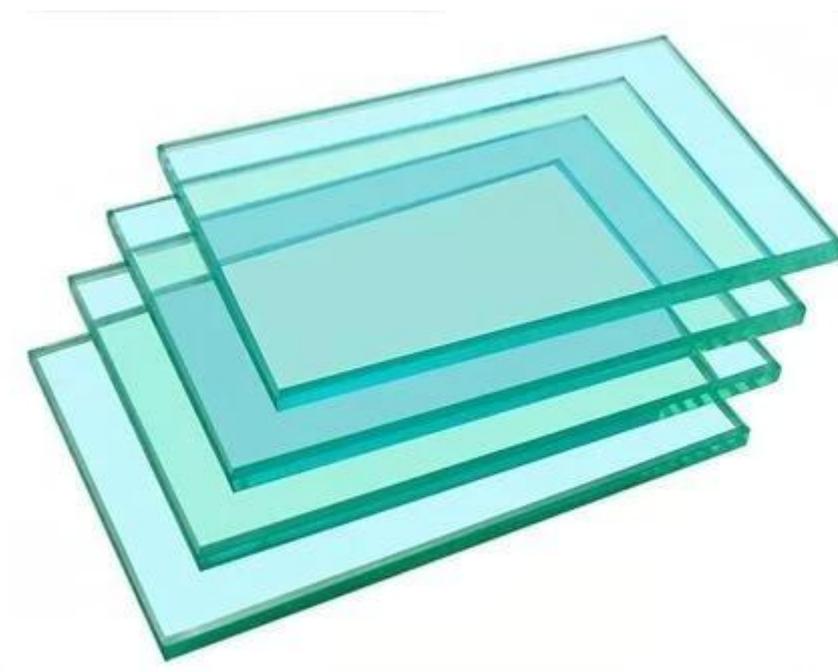

鋼板鋼 鋼板鋼 鋼板 鋼 鋼板



□□□□□□□□ □□□□ □□□□ □□□□ □□□□ □□ □□ □□ □□ □□ □□□□□□

