



PVB laminated



SGP laminated



EVA laminated

12.76 10000 00 000 00 0000 00000000 00000000 000000000 000000000 000000 00 00 12.76 00000 00 00000 000000000 00000000 000000000 000000000 000000000 000000 00, 00000000 00000 000000 00 00000000 00 00 00 000 0000 1/10000 00 000 00 000 00000 00000 000000000 00 000000 00 000000000 00, 00 00 00 00000 00000000 00 00000 00 00000 00 00000 000000 00 00000 00000 00 00000 00000 00 00000 00000

[illegible]

- [][][][][][][]


-

--	--	--	--

--	--	--	--	--	--	--	--


- □□□□ □□□□□□

-□□□ □□□□ □□□□ □□ □□ □□□□□□□□ □□□ □□□□□□ □□ □□□□□□



UV control

Filtering ultraviolet function not only protects people's skin health, but also makes their valuable furniture and display products get rid of faded doom.

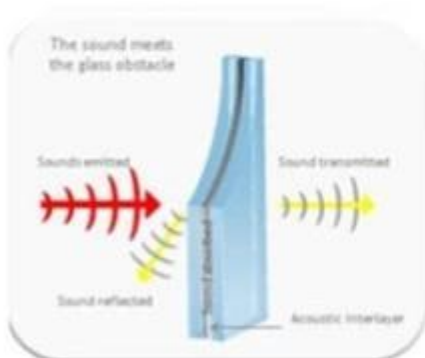

Color Lamination

Colored interlayer options are available

12.76

□□	12.76 □□□□□□ □□□□ □□ □□□□□□ □□□□□□
□□□□□□ □□□□	3300 *5200mm



በ ስርዓቱ ውስጥ የሚገኙትን አጠቃላይ መረጃዎች በአጭር ሪፖርት በመቀመጥና በማጣቀስ ማስተላለፍ ይቻላል።

tempering laminating process

Raw Material



Bottero-cutting



Grinding



Tempering



Laminating



Packing



tempering laminating process

tempering laminating process, tempering laminating process, tempering laminating process, tempering laminating process, tempering laminating process

Our Sales Team



Our Clients

