□□□□ □□□□□□□ □□ □□□□□□ □□□ □□□□□□□□ □□□□□ □□□□□□ **6** □□□□ **+ 12** □□□□ □□□□□ **+ 6** □□□□ **low e** □□□ □□□□□□□□□□ □□□□□□□□□

□□□□□ low e □□□□□□ □□□□□ □□□□□□□□ □□ □□ □□□□ □□□□ □□□□□□□ □□□□□□□ □□ □□□ □□ □□□□ □□□□□□□□ □□□□ □□□□□□ □□□□□□□□ □□□□ □□□□ □□□ □□ □□□□□□□□□ □□□□□ □□ □□□ low e □□ □□□□□□ □□ □□□□ □□□□□□ □□□□ □□□□□ □□□ □□ □□□□□ □□ □□□□□ □□□□ □□□□□□□□ □□□□ □□ □□ □□□□ □□□ □□ □□□□ □□□□ □□ □□□□ □□□ □□ □□□ □□□□ □□□

6 + 12Ar + 6 low e □□□ □□□□□□□□□□ □□□□□ □□ □□□□□□ □□□ □□ □□□□□□ □□ □□□□□ □□ □□□□□ □□□□□□□ □□□ □□□□□ □□□□ □□□□ □□□ □□□□ □□□ □□ □□ □□ □□□□□ □□□□□□□□ □□ □□□□□□□□□□□□□ □□□□□□□ □□ □□□□ □□□□ □□□□□□□□ □□ □□□□□ □□□□□ □□ □□□ □□ □□□□ □□□□ low e □□□□□□ □□ □□□ □□ low e □□□□□□ □□□ □□□□□ □□, 6 + 12Ar + 6 low e □□□ □□□□□□□□□□ □□□□□ □□□□□ □□□□□□□ □□□ □□□□ □□ □□□□ □□□ □□ □□□□ □□□□□□ □□□ □□□□ □□□□ □□ □□□□□□ □□□ □□□□□□□ □□ □□□□□ □□ □□ □□□□□ □□ □□□□□ □□ □□□□□□

□□□ □□ □□□□□□□□ 6 + 12Ar + 6 low e □□□ □□□□□□□□□□ □□□□□ □□□□□□□□ □□ □□□□□□ □□ □□□□ □□□□□□□□ □□□ □□□□□ □□ □□□□□ low e □□□□□□ □□ □□□ U- □□□ 1.6K / W 1.8 ~ 1.8 K / W AA □□□□ □□□ □□□ low e □□□□□□ □□ □□□ U- □□□ 1.3K / W 1.6 ~ 1.6K / W coating □□□
□□□ □□□□□ □□□□ □□ □□□□□ □□□□ □□ □□□□□ □□□□ □□, □□□□□ □□□ □□□□ □□□□□□ □□□□□□□□ □□□□□□ □□ □□□□□□ □□□

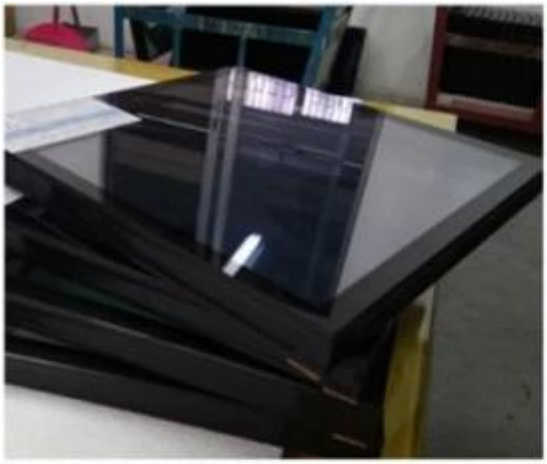

□□□□□ □□ □□□ **6 + 12Ar + 6 low e** □□□ □□□□□□□□□□ □□□□□ □□ □□□□□□□□□□

□□□□□□□	6mm □□□□□□□□ □□□□□ + 12Ar + 6 low e □□□□□□□□
□□□□□□ □□ □□□□□□	□□□ low e, □□□ low e, □□□ □□□□□□□□ □□□□□□, □□□□
□□□□	□□□□□ / □□□□□□□□

□□□□	□□□□□□□□ □□ 1036-06 □□□ □□□□□ & □□□□ EN1096
□□□□□	6 □□□□ + 12Ar + 6 □□□□
□□□□□□□□□□□	□□□□□□ □□□□□, □□□□□□□□□ □□□, □□□□ □□□□□ □□□□, □□□□□ □□□□□□□ □□□□□□□, □□□□□□ □□□□□□□, □□□
□□□□□	□□□□□□, □□□□□ □□ □□□□□, □□□□□□□□□□, □□□□
□□□□ □□ □□□□□□	□□□□□□□ □□□□□□ low e □□□ □□□□□□□□□ □□□□□, □□□□□□ low e □□□ □□□□□□□□□ □□□□□, □□□□□□ □□□ □□□□□□□□□ □□□□□, □□□ □□□ □□□□□□□ low e □□□ □□□□□□□□□ □□□□□, □□□□□□□ □□□□□ low e □□□ □□□□□□□□□ □□□□□, □□□ □□□□□ low e □□□ □□□□□□□□□ □□□□□, □□□

□□□ □□□□□□□□ □□ □□□ **6 + 12Ar + 6 low e** □□□□□ □□□□□**:**

1-□□□□ □□□□□□□□ □□ U □□□ & lt; 1.7K / W □□ □□□□

2-□□□□□□□ □□□□□□□□□□□□□, □□ 20% □□ 75% □□ □□□□ □□ □□□□□ □□ □□□□□□□□□ □□ □□□□ □□;

3-□□□□□□□□ □□□□□□□□ □□ □□□□ 0.25 ~ 0.65 □□ □□□ □□□□□□

4-□□□□□□□□□□□□ □□□□ □□ □□□□□□ □□□□□□□□□, □□□□□□ □□□□ 2500x7500 □□□□;

5- 5% ~ 50% □□ □□□□□□□□ □□□□□□

6-low e □□□□□□ □□ □□□ □□□□□ □□□□, □□□□□ □□□□, □□□□□□ □□□ □□ □□□□□ □□ □□□□ □□□ □□□□□□□□, □□□□

10000 □□□□□□□□ / □□□ □□ □□□ 7-□□□□ □□□□□□ □□□□□□

8-□□□□□ □□□□□ □□□□□□□□ □□□□ □□ □□□□□□□□□ □□□□ □□ □□ low e □□□□□ □□□□ □□□□□□ □□ □□□ □□□□□□□□□ □□□

9-□□□□ □□□ □□ □□□□□□□□ Bystronic □□□□□□□□□□ □□□□ □□□ □□□□□□□□□ □□□ □□□□ □□□ □□ □□□□□□ □□ □□ □□□□□ □□□ □□□ □□□□ □□ □□ □□□□□□□

10-□□□□□ □□□□□□□□ □□□□□ □□□□ □□□□ □□ □□□□□□ □□ □□□ low e □□□ □□□□□□□□□ □□□□□ □□□□□□□□ □□ □□□□□□□ □□□□□□□□□ □□□□ □□□

□□□□□□□□□□ □□□□□ **Jimy Glass** □□□□□□ **6+ 12** □□□□ □□□□□ **+ 6 low e** □□□ □□□□□□□□□ □□□□□□□ □□ □□□ □□□□**?**

1) □□ □□□□□□ □□□□□□□□ □□□□ □□□□□ □□□□ □□□□□□□ □□ □□□□□ □□□□ □□□, □□□□□□ □□□ □□□□□ □□□□ □□□□□□□ □□□□ □□□□□ □□□ □□ □□□ □□□ □□□□□ □□□□ □□;

2) □□ □□□□□ □□□□ □□ □□□□□□□□ □□□□ □□ □□□□□ □□□□ □□□ □□□□ □□ □□□□□□□□□ □□ □□□ □□ □□□□□ □□□□□ □□□□□□□□□ □□ □□□□□□□□, □□□□□□ □□□□□□□□□ □□□□□□□ □□□□□□□ □□ □□□, □□□□ □□□□□□□ □□ 0.1% □□ □□ □□□

3) □□□□□ □□□□□□ □□□□ □□□□□□ □□□□□□□□□ □□□□ □□ □□□ □□□□□□□□ □□□□□□□□□ □□ □□□ □□□□ □□□□□□□□ □□□□□□□□;

4) □□□□ □□□□□ □□□□□□□□□□ □□ □□□□ □□□□□ □□□□□□ □□□□□□ □□ □□□, □□□□ □□□□□□ □□□□□ □□□□□ □□ □□□□□□□ □□ □□□□□□□□ □□□□□□□□ □□□□;

5) □□□□ □□□□□□ □□ □□□ □□□□□ 6 + 12Argon + 6 low e □□□ □□□□□□□□□ □□□□□ □□ □□□□ □□□□□ □□□ □□□□ □□□□□□□□□□□□ □□□

6) □□□□ □□ □□□□□□□□□□□ □□□□, □□□□□ □□□□□ □□□□□□ □□□ □□ □□□ □□ □□□□ 1 □□□□ □□ □□□□ □□□□ □□ □□□□ □□□

□□ 24 □□□□ □□ □□□□ □□□□ □□□ □□□□□□ □□□□□□ □□ □□□□ □□□□

7) □□□□□ □□□ 26 □□□ □□ □□□□□□□ □□□□□ □□, □□ □□□□ □□□ □□□□□ □□ □□□□□□□□ □□ □□□□□□□ □□ □□□□□□□ □□□ □□□□□ □□□□

□□□□□□□□ □□□:

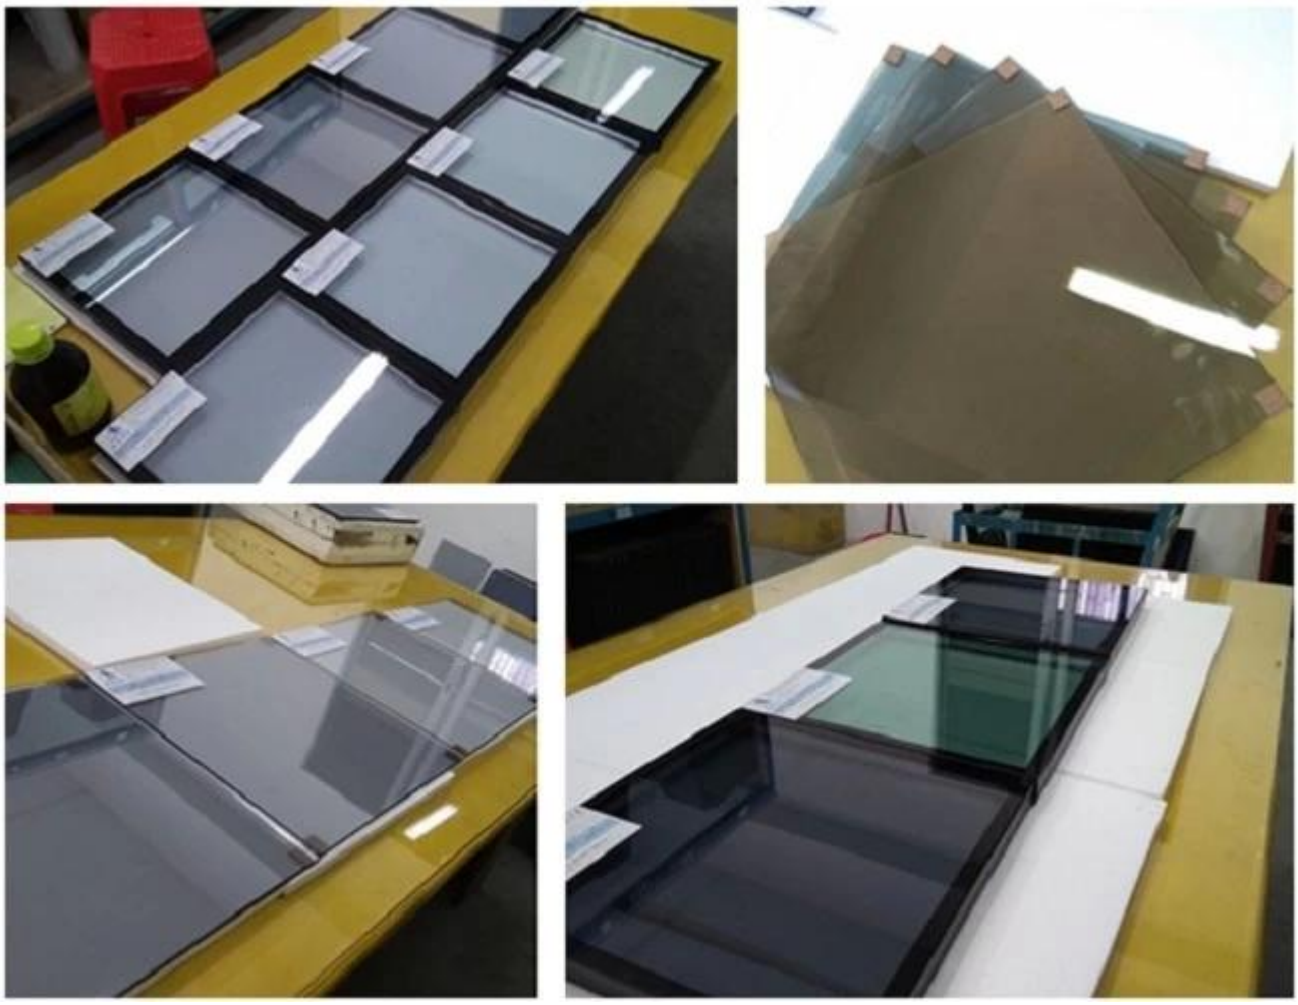

□□□□□□ □□ □□□ □□□□□□□□ □□□□:

JIMY
Professional glass manufacturer

Jimy Glass

Glass Performance Data

Configuration	Visible light T%	Visible light Rout%	Visible light Rin%	Solar energy T%	Solar energy Rout%	SC	SHGC	NFRC U-Value Sum.	NFRC U-Value Win.
6 single low e +12Ar+ 6 clear	53	20	10	34	21	0.46	0.40	1.54	1.56
6 double low e +12Ar+ 6 clear	57	9	11	27	26	0.37	0.33	1.33	1.40

1. All data are calculated by WINDOW 7.5 developed at Lawrence Berkeley National Laboratory ! For your design reference only!
2. The tolerance of published data with respect to photometric properties is +/- 3 points. The U-value tolerance is +/- 0.1W/m².K

Low e □□□ □□□□□□□□□□ □□□□□ □□□□□□□ □□□□□□□□□□:

LISEC
cutting
grinding
tempering
insulating

[illegible]

2019/08/18 19:15

CSNU 137923
22G1