


24 26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100

7) 26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100

26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100

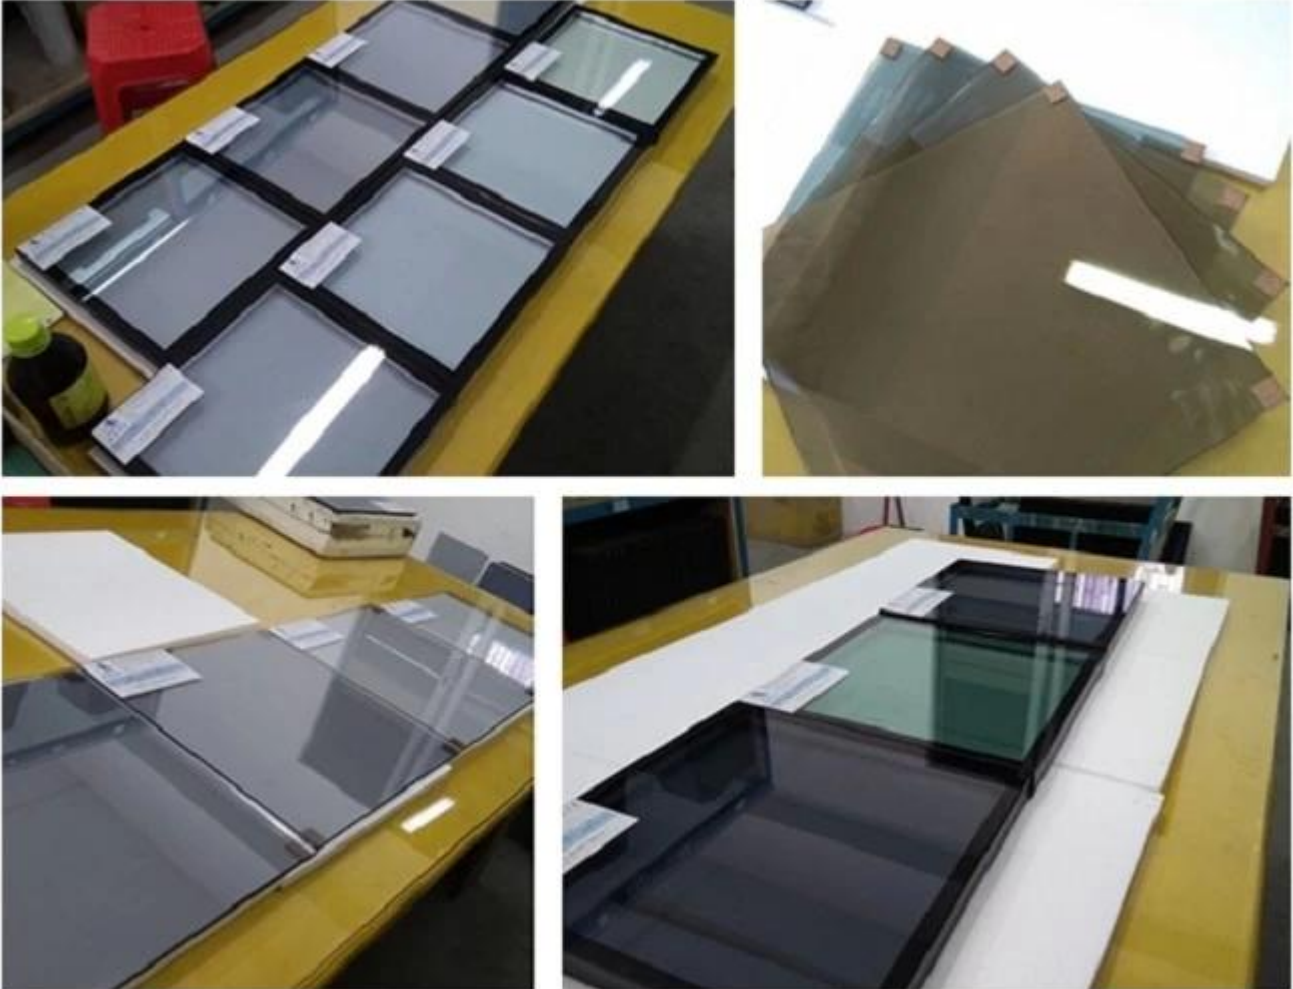

26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100



Jimmy Glass
Glass Performance Data

Configuration	Visible light T%	Visible light Rout%	Visible light Rin%	Solar energy T%	Solar energy Rout%	SC	SHGC	NFRC U-Value Sum.	NFRC U-Value Win.
6 single low e +12Ar+ 6 clear	53	20	10	34	21	0.46	0.40	1.54	1.56
6 double low e +12Ar+ 6 clear	57	9	11	27	26	0.37	0.33	1.33	1.40

1. All data are calculated by WINDOW 7.5 developed at Lawrence Berkeley National Laboratory ! For your design reference only!
2. The tolerance of published data with respect to photoelectric properties is +/- 3 points. The U-value tolerance is +/- 0.1W/m².K

Low e 26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100



□□□□ □□□□ □□ □□□□□□ □□ □□□□□ □□□□□□ □□□□□□□□□□ □□□□ □□ □□□ □□□□□□□ □□□□□□

