





The complete smart film with glass, after installed can directly used



Normal self smart film which can directly glue outside of the already installed glass window and door, etc




smart film with printed pattern design smart film can printed any pattern design as per desire

$000000 \ 00000 \ 00000 \ 00 \ 00000$


Item :	Switchable Smart film ,PDLC film,Magic film
Technology Category:	PDLC film
Thickness:	0.5mm
Storage temperature:	-20 ° C to 60 ° C
Working temperature:	minus 10 degrees to 50 degrees Celsius
minus 10 degrees to 50 degrees Celsius	24VAC, 48VAC or 65VAC (above 65VAC is no t recommended non-safe voltage)
Light transmittance:	about 75%
Privacy distance:	Shield any image 3cm away from the other sid e of the glass
Viewing angle:	about 140 degrees.
Average energy consumption:	5 watts per square meter
Guarantee time :	at least 2 years

OO 000000 00000 OO 000 0000 OO?

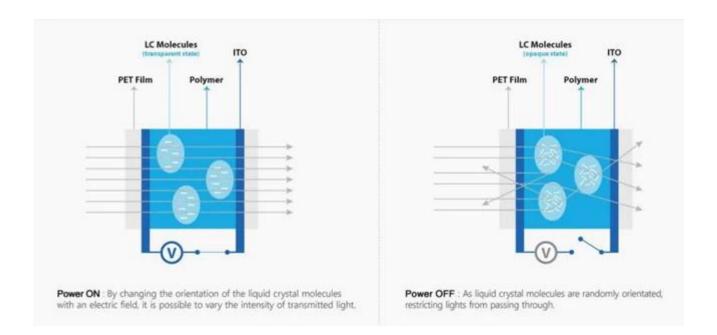





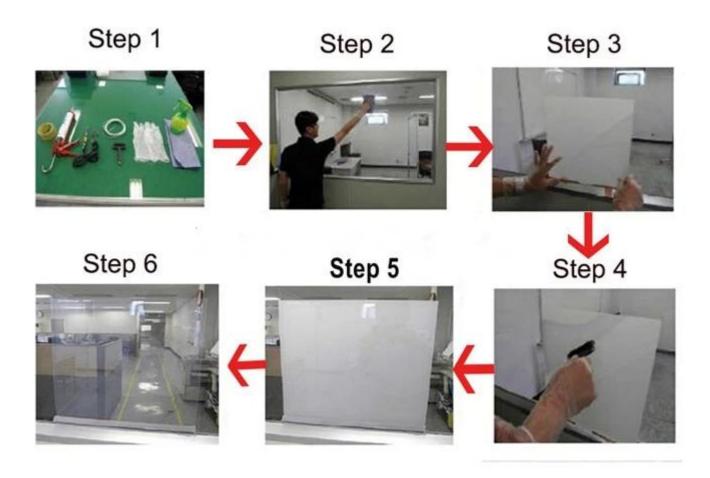

- 4. 0000 00 000000 00000 0000 0000 00
- 5. 000, 00000000 00 000 00000 00

