

## China glass floor factory supply 6+6+6mm tempered laminated glass

Tempered laminated glass is always recommended due to durability and resistance to breakage of glass generally needed to support to the walk on glass floor. We recommend 3 layers [6mm tempered glass](#) to make laminated glass floor.

A glass floor is the perfect way to increase floor space, whilst simultaneously bringing natural light into the spaces below. Glass as a flooring material is used in both residential and commercial structures. Glass floor offering light, space, and freedom of design, glass floors can be installed inside or outside, in clear or obscured glass, with either a non-slip or silky smooth surface.

Clear and flat glass floor can bring clear and open vision, used in scenic spot, tour tower floor, glass bridge, etc, can be perspective and light and landscape, give a person a kind of stimulate visual experience.

The glass is finished translucent for ample light transmission through the structural glass unit whilst providing privacy and anti-slip resistance. JIMY Glass Company can apply frosted glass/ acid etched glass/sandblasted finish to the external surface of the glass floor to create a rougher surface. but they only get the obscure effect, no too much anti-skid effect,

Anti-slip resistance can be applied to the surface of glass floor, especially to external glass floors. anti-slip can be applied to the glass floor to allow vision through the glass panels whilst providing anti-slip for added safety, The surface glass used the tempered laminated glass coated with special anti-slip film (NSS), screen printing non-slippery glass and special dot design skid resistance glass. These include specialised ceramic inks applied to the surface of the glass in various patterns, or indented patterns applied to the glass surface.

### Specification of triple tempered laminated glass floor:

Original glass: clear float glass, ultra clear glass, tinted glass, [acid etched glass](#), screen-printed glass, patterned glass, etc.

Size: Mini 300\*300mm, any customized measurements

Popular glass thickness: 6+6+6mm, 8+8+8mm, 10+10+10mm, etc.

Popular PVB interlayer thickness: 1.14mm 1.52mm, etc.

SGP thickness 0.89mm, 1.52mm, 2.28mm, 3.04mm, etc. SGP (Dupond Sentry Glass Plus)

### Which type anti slip floor glass you can by from JIMY GLASS?

Clear tempered laminated anti slip glass floor

Low iron tempered laminated anti slip glass floor

Frosted laminated anti slip glass floor

Silk screen printed [tempered laminated glass](#) floor

Non Skid Resistance Floor Glass

### Tempered laminated glass other applications:

Hotels, restaurants, coffee shops



viewing platform or stair treads.

Airport, railway stations, sports center road surface

Super markets, museum, shopping malls,

walkable skylights, catwalks, bridges, terraces,

**Anti-skid glass used to make laminated glass floor:**

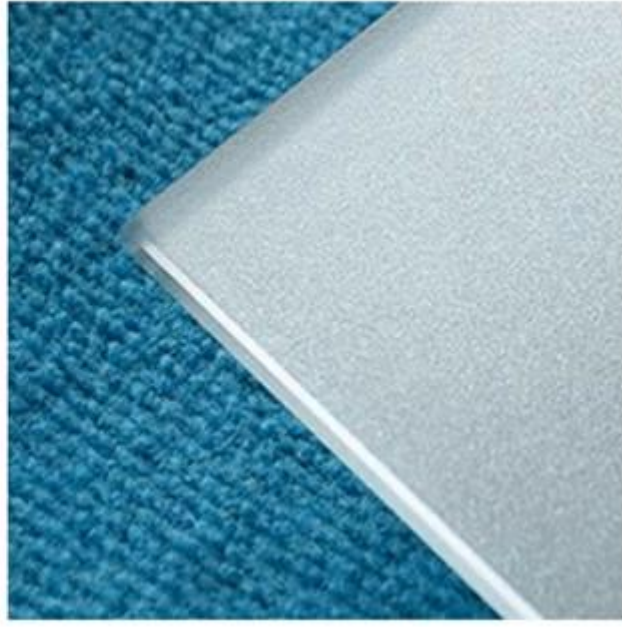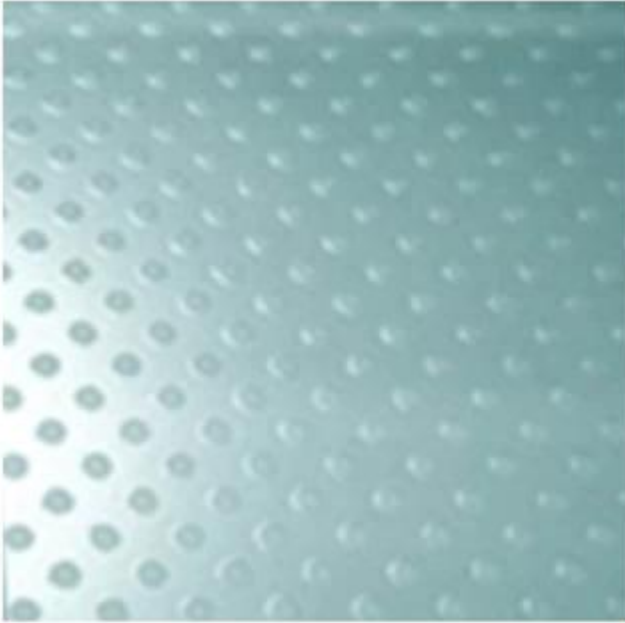

**Clear 21.04mm tempered laminated glass floor**



**Anti-skid frosted glass floor application:**



**Safety floor glass factory machine:**



