

12.76mm 6 + 0.76 + 6mm EVA PVB SGP ESG VSG



12.76mm 6mm 6mm 2mm led 2 PVB / SGP / EVA
PVB
PVB

12.76mm 12.76mm 1/10000

2 EVA PVB SGP

□ □ □ □ □ □ □ □

-

-UV □□□□□□

-

[illegible][illegible]



Security


Superstrong impact resistance, hard to be broken.

Can resist the continuous attack of hammers, knives, etc.




Safety

Even if glass breaks, debris will stick to the film, and the broken glass surface will remain clean and smooth. It effectively prevented the occurrence of debris puncture and penetrating crashes.

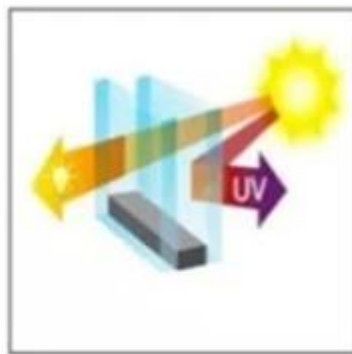

UV control

Filtering ultraviolet function not only protects people's skin health, but also makes their valuable furniture and display products get rid of faded doom.

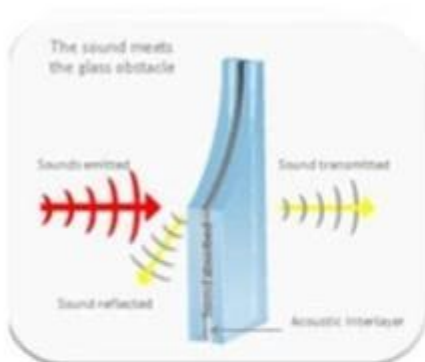

Sund Reduction

PVB interlayer is an effective absorber of sound



Earth quake & Storms

Remains in frame
and deter glass
shards from flying



Color Lamination

Colored interlayer options are available

12.76

厚度	12.76mm
標準尺寸	1000 * 5200mm
公差	±0.76mm
材料	聚碳酸酯板
夾層 / 膠合 / EVA 厚度	0.76mm
重量	約 1.2kg/m²

-
-
-
-
-
-
-
-

JIMY GLASS

1993Low E-U



sysrerm

tempering laminating process

Raw Material



Bottero-cutting



Grinding



Tempering



Laminating



Packing



□□ □□ □□□ □ □□ □□□□□ □□□ □□ □□

[illegible]

Our Sales Team



Our Clients

