5 mm
5 mm
5 MM 0000000 0005 mm 00000 000 5 mm 00000000
5 mm 00000 000 00
• 0000000000000000000000000000000000000

5 mm 00000 0000000000

5 mm 000000 000 00000000

5 mm [][][][]

0000: 00000000 5-7 0000

00000: L/C0T/T00000 0 0000

1. ____TDHL_UPS____TNT_

2. []: [][]


5 mm 000000 000 000000 000

Low Iron Float Glass Performance Data

Thickness	Visible Light Transmitt ance	Visible Light Reflectivity	Solar Radiant Heat				Shading Coefficient			U Value	Sound Insulation		UV
			Direct Penetrate	Reflect	Absorb	Total Penetrate	Short Wave	Long Wave	Total	(W/m2K)	Rm (dB)	Rw (dB)	Penetration
3 mm	92.0%	8.0%	91.0%	8.0%	1.0%	91,0%	1.05	0.01	1.05	5.8	26	30	85
3.2 mm	91.8%	8.0%	91.0%	8.0%	2.0%	91.0%	1.03	0.01	1.05	5.8	26	30	84
4 mm	91.6%	8.0%	90.0%	8.0%	2.0%	91.0%	1.03	0.01	1.05	5.8	27	30	82
5 mm	91.5%	8.0%	90.0%	8.0%	2.0%	90.0%	1.03	0.01	1.03	5.8	29	32	81
6 mm	91.4%	8.0%	89.0%	8.0%	3.0%	90.0%	1.02	0.01	1.03	5.7	29	32	79
8 mm	91.0%	8.0%	88.0%	8.0%	4.0%	89.0%	1.01	0.01	1,02	5.7	31	34	76
10 mm	91.0%	8.0%	88.0%	8.0%	4.0%	89.0%	1.01	0.02	1.02	5.6	33	36	74
12 mm	91.0%	8.0%	87.0%	8.0%	5.0%	88.0%	1	0.02	1.01	5.5	34	37	72
15 mm	90.0%	8.0%	86.0%	8.0%	6.0%	87.0%	0.99	0.02	1.	5.5	35	38	71
19 mm	90.0%	8.0%	84.0%	8.0%	7.0%	86.0%	0.97	0.02	0.99	5.5	37	40	70

for reference only.

5 MM 000000 000

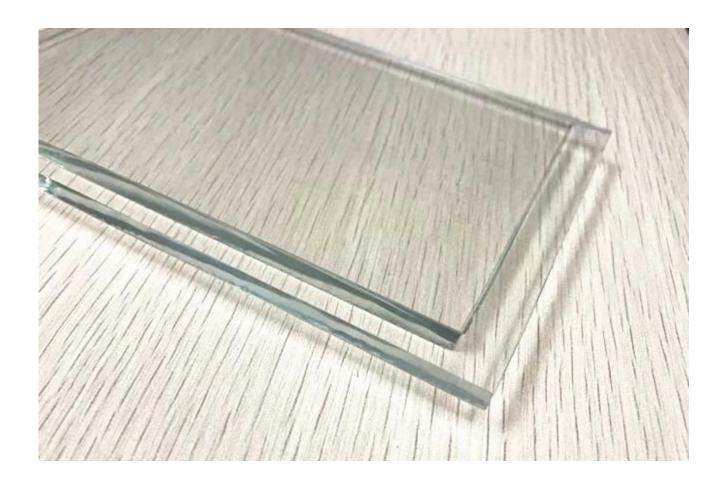





___ **5 MM** ____ __

