


PDLC



PDLC 1 led 2

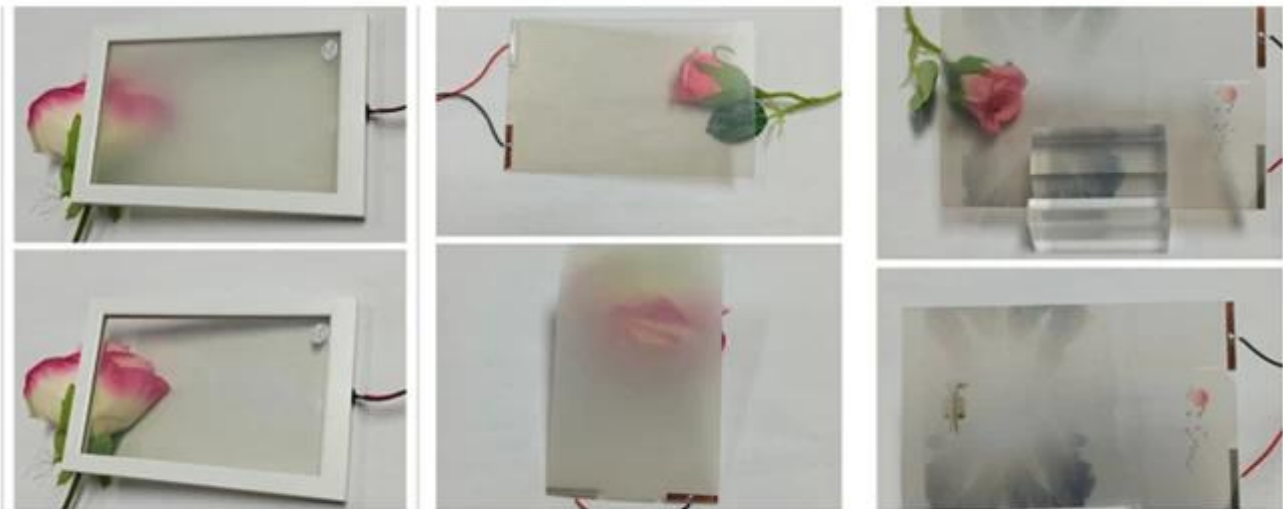

**smart film glass**

The complete smart film with glass, after installed can directly used

**Normal self smart film**

which can directly glue outside of the already installed glass window and door, etc

**smart film with printed pattern design**

smart film can printed any pattern design as per desire

□□□□□□□□□□□□□□

Item :	Switchable Smart film ,PDLC film,Magic film
Technology Category:	PDLC film
Thickness:	0.5mm
Storage temperature:	-20 ° C to 60 ° C
Working temperature:	minus 10 degrees to 50 degrees Celsius
minus 10 degrees to 50 degrees Celsius	24VAC, 48VAC or 65VAC (above 65VAC is not recommended non-safe voltage)
Light transmittance:	about 75%
Privacy distance:	Shield any image 3cm away from the other side of the glass
Viewing angle:	about 140 degrees.
Average energy consumption:	5 watts per square meter
Guarantee time :	at least 2 years

□□□□□□□□□□□□□□



Step 1



Step 2



Step 3



Step 6



Step 5



Step 4



PDLC

1. PDLC
2. PDLC
3. PDLC
4. PDLC
5. PDLC
6. PDLC
7. PDLC

PDLC a

