

一、PVB / EVA 玻璃

1. PVB / EVA 玻璃

EVA 玻璃

	PVB Film laminated glass	EVA film laminated glass
Processing, storage conditions	Storage conditions are temperature (18-22℃),humidity (25%-40%),especially for the humidity requirements are very strict, Producing need high temperature (120-140℃)and high pressure (1.0-1.5MPa),mostly with autoclave equipment.	Storage conditions are relatively low, the temperature does not exceed 30 ℃, humidity can be less than 80%, the film requirements of the equipment is also low, Vacuum degree of ≥ 700mmHg (0.092Mpa), the temperature is 100-110 ℃
Process time	longer than EVA, energy consumption is also large.	Low ,energy consumption is also small.
Glass cost	PVB laminated glass can be produced in bulk quantity like more than 1000sqm one time,laminated machine expensive.	EVA laminated glass just several square one time, laminated machine cost cheaper.
Anti-aging performance	PVB anti-aging performance,impact resistance stronger than EVA.	EVA anti-aging performance,impact resistance stronger less than PVB.

二、

1.

2.

3.

4.

5.




6.

7.


8.

9.

10.

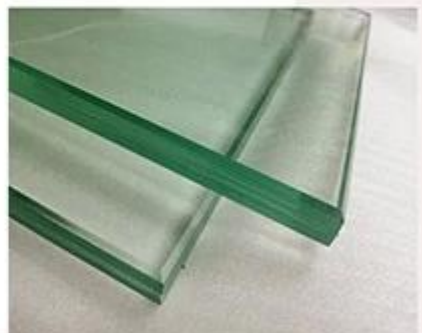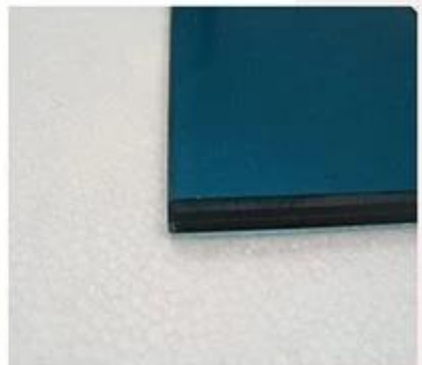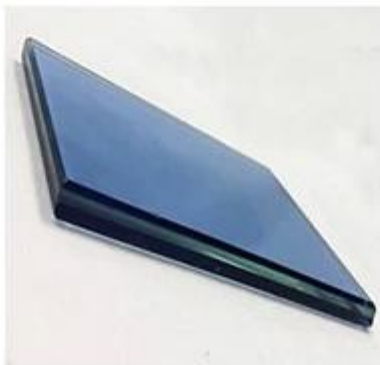

EVA

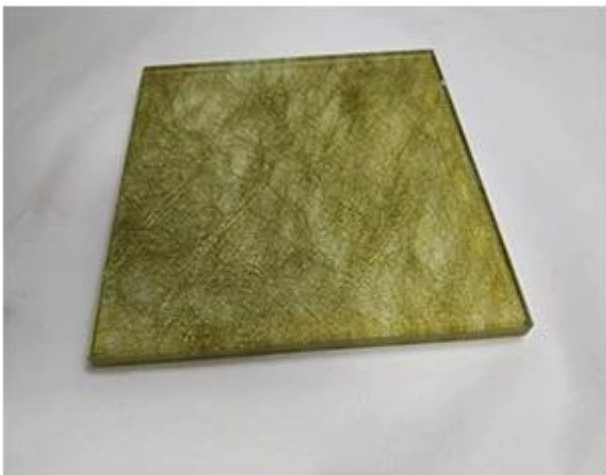

EVA

[illegible]



□□□□□□PVB□□□□□□□□



□□□□□



□□□□

