


China factory 3/8 tempered glass door, 1/2 clear tempered glass, tempered glass for door

10mm, [12mm tempered glass door panel](#), and called 3/8, 1/2 toughened glass or ESG glass door, which produced by very high quality raw glass, with excellent cutting, edging and other process works, then going with strict tempering processing crafts, make sure high strength performance, and low explosion rate reach 1/1000. It's excellent choices for different door projects uses, like [glass sliding door](#), glass opening door, tempered glass door store, [glass door shower](#), and so on.




Below we share some projects use our glass photos of 3/8, 1/2 tempered glass opening door, sliding door, and shower door:

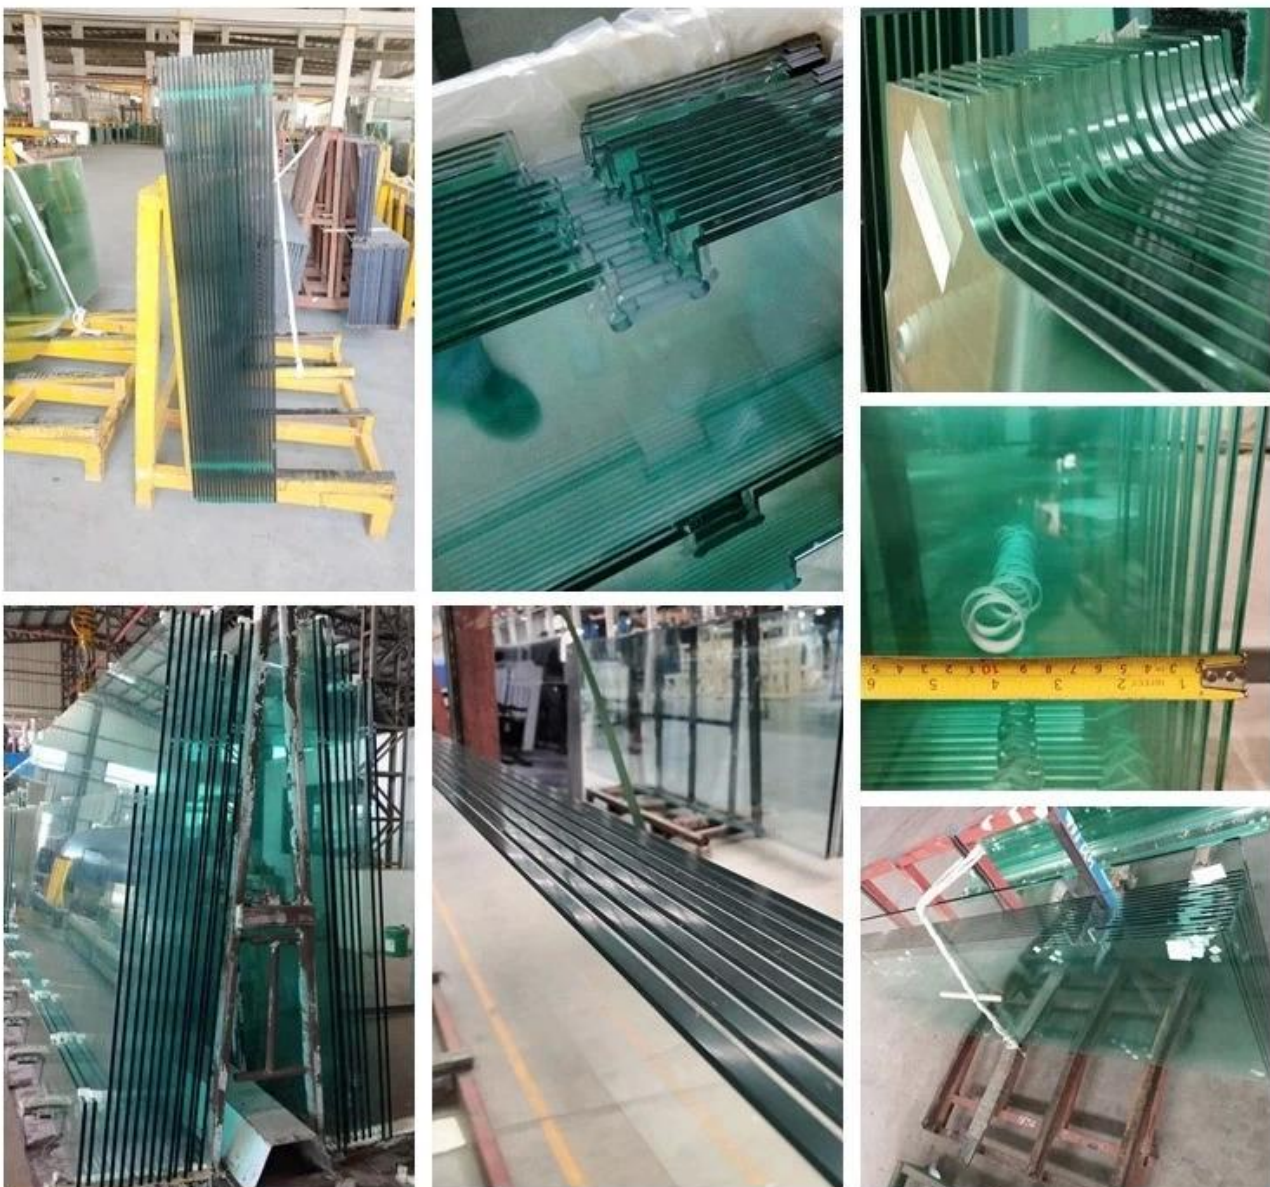

For glass door have holes, cutouts, notches, need install by glass fitting, our company have very professional supply chain department which will in charge of glass fittings supply and meet different clients their requirements, providing one stop service to help our clients more

convenient.

Normal tempered glass door fitting:

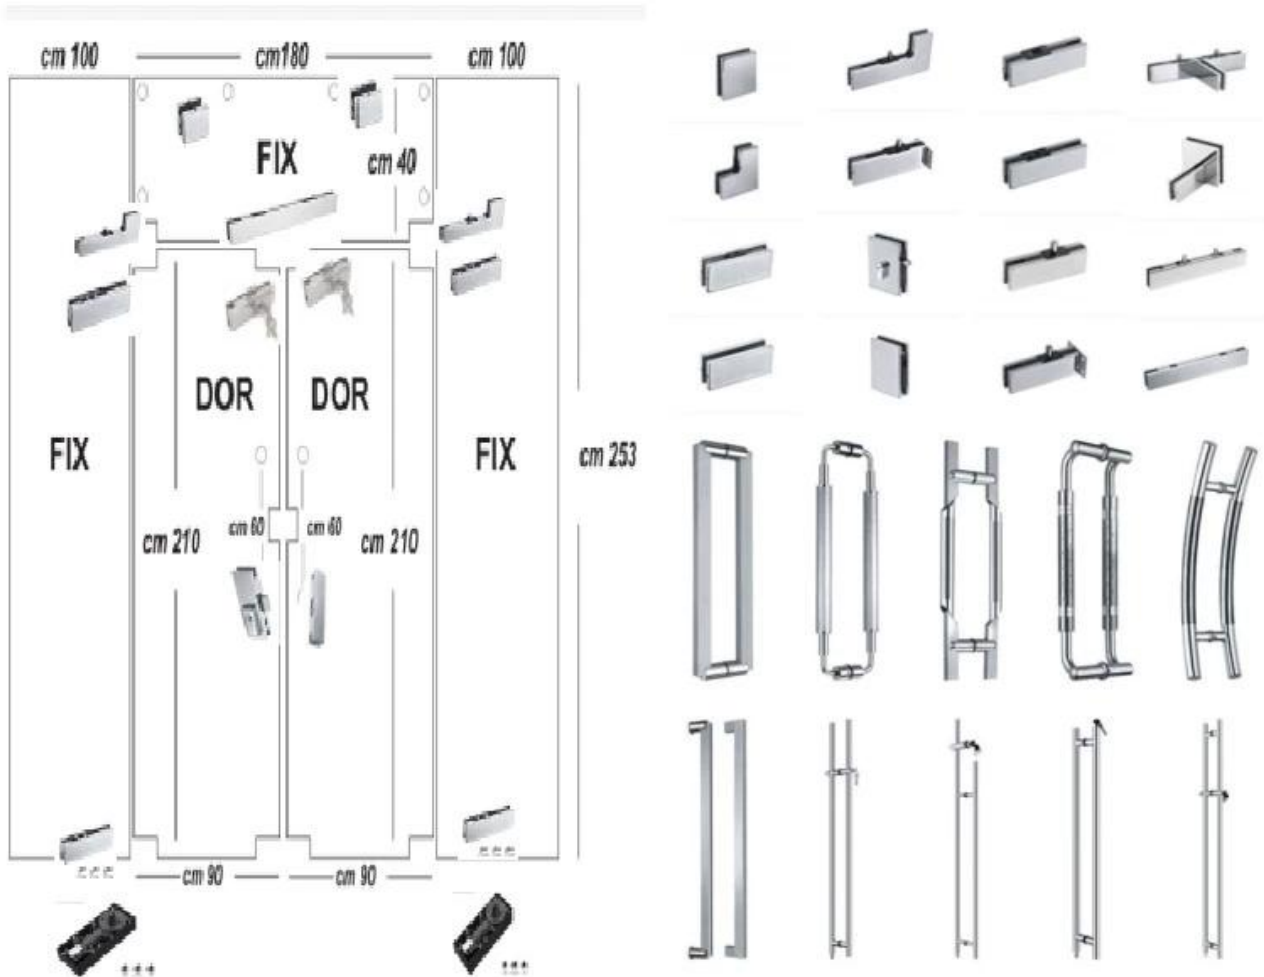

Tempered glass shower door fitting:



Specification of 3/8, 1/2 tempered glass for door

Glass Shape	Flat and curved shape
Glass Type	10mm, 12mm toughened glass, ESG, tempered glass for door
Available Thickness	10mm, 12mm, or 3/8, 1/2; other thickness like 15mm, 19mm
Available Design	<ul style="list-style-type: none"> - For high light transmittance, have clear glass and ultra clear glass - For decorative, have colored glass, patterned glass, textured glass, ribbed glass, silk printed glass, etc. - For privacy, have frosted glass, etched glass, smart glass, etc. - Other customized design
Processing works	Cut into size, drill holes for tempered glass door handle, cut notches for tempered glass door hinges, cutouts for patches, other customized processing, and help install to finished door products if need aluminum profile for decorated.

Why choose door toughened glass from us?

- 1) Select grade A float glass with no chips zero bubbles, zero scratches and perfect flat surface performance.
- 2) Our own advanced temper machine to guarantee our door tempered glass quality, with splendid temper stress uniformity, the self explosion rate reduce to 0.1%, or closed to 1/10000 or Zero when use low iron float glass tempered after heat soak test.
- 3) Much strict quality control according to ISO9001, make sure accurate size, thickness, and process works when delivery
- 4) Use brand new customized strong plywood crates with corks separate and plastic film fully covered outside to guarantee loading safety and avoid breaking when sea transportation.

5) Provide high quality glass fittings like 304 material stainless steel handle, stainless steel door hinges, and stainless steel patches for durable use and convenient installation.

Our professional tempered glass production flow, every step will have professional people control quality seriously.



We inspect holes, edges, grooves by glass fittings, and inspect size, and thickness of 10mm 12mm tempered glass for door with professional tools, piece by piece, make sure every glass in our clients hand will be perfect.



In conclusion, strong packages with very professional disinfection on door ESG glass products and outside of container, make sure every cargoes in our clients hand will be safety.

