


CE standard 21.52mm milky white tempered laminated glass 1010.4 ESG VSG 10+10mm white laminates for sale

21.52mm [milky white tempered laminated glass](#), also called opaque [1010.4 ESG VSG](#) and 10+10mm white toughened laminates, which combine with two [10mm toughened glass](#) layers, with white/opaque PVB or EVA film, make sure high safety and high safety performance, a good choice in some area, such as balustrade, railing, windows, exterior wall, facade, canopy, roof, and interior decorative projects. And also popular in some private area, make sure privacy.



Full details of 10+10mm milky white tempered laminated glass

Glass type	21.52mm opaque tempered laminated glass
Glass thickness	10+10mm, 21.52mm
Glass color	Milky white, Opaque, translucent
Dimension	Maximum size reach 3300*8000mm,support customized
Standard	EN12150, EN14449, ANSI Z97, ISO9001, CCC
Delivery time	Around 15-20 days, urgent order can reach 7 days
Processing work	Holes drill, cutouts, mark print and so on
Other services	Provide other materials, such aluminum alloy, stainless steel

New delivery photos for 10+10mm milky white tempered laminated glass

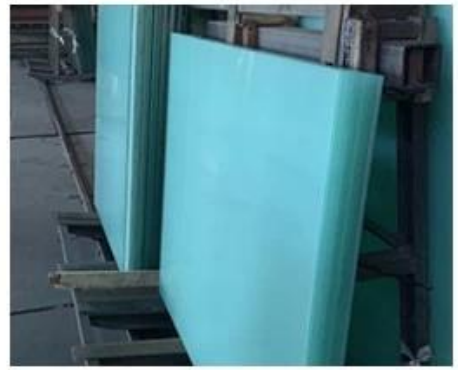

Some installed photos for milky white tempered laminated glass

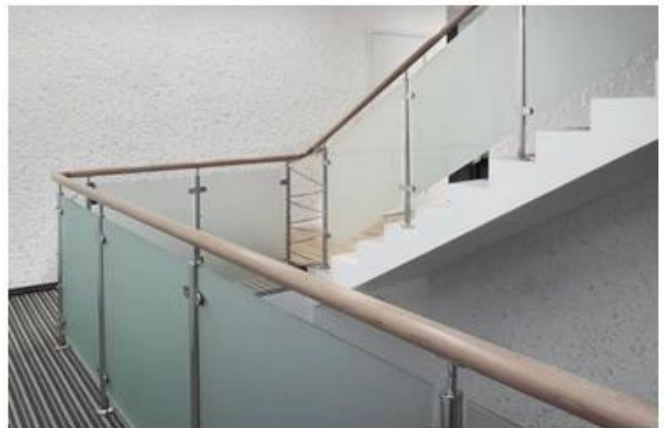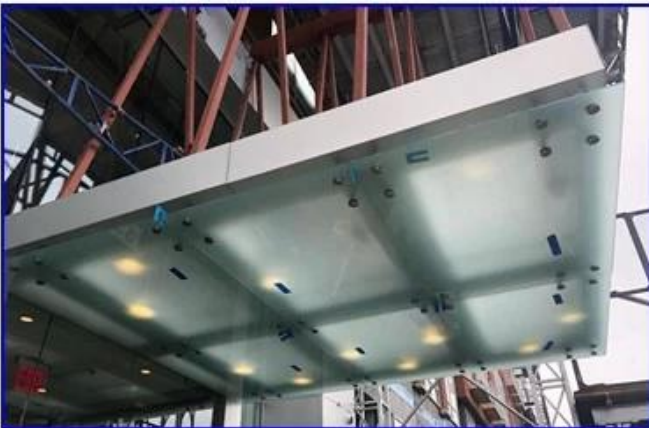

How JIMY GLASS can make sure glass quality?

Source of raw materials

When prepare the raw materials, we will use professional measuring equipment to make size, thickness accurate, and surface whether have scratches, bubbles, this is the most important step, because the quality of raw materials determines the quality of processed products.



时间	供应商/产地	批号	原片生产 日期	品种	等级	玻璃尺寸 (mm)	包 数量	箱 数量	检测内容										备注
									No.	原片 类型	厚度 (mm)	长度 (mm)	宽度 (mm)	外观	合格 证	封边	包装 情况		
	信义(内蒙)	F-1001201- -5mm3000	2019.10.1	5C	CP	3160x2440	45	5	1	C	5	3160	2440	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3160x2440	45	2	C	5	3160	2440	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3160x2440	35	3	C	5	3160	2440	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3160x2440	35	4	C	5	3160	2440	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3160x2440	35	5	C	5	3160	2440	✓	✓	✓	精	裸	合格	
	信义(内蒙)	5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	19	3	1	C	8	3150	2320	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	19	3	C	8	3150	2320	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	19	3	C	8	3150	2320	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	17	2	C	10	3150	2320	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	17	3	C	10	3150	2320	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	17	3	C	10	3150	2320	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	17	5	C	10	3150	2320	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	17	6	C	10	3150	2320	✓	✓	✓	精	裸	合格	
		5mm3000- -5mm3000	2019.10.1	5C	CP	3150x2320	17	7	C	10	3150	2320	✓	✓	✓	精	裸	合格	

备注:

Cutting, edging, holes drilling, cutouts

In this step, we will operate by automatic machine and according to client's drawings, make sure accurate, after processing, we will inspect twice then coming to next step.



Tempering and laminating process

Advanced import tempering furnace and autoclave, make sure quality have guarantee, very small self explosion rate of tempered glass, reach 0.1%, and laminated glass, dislocation of two layers will control smaller than 1mm



Professional glass manufacturer

Package and packing

All will use high safety plywood crates with corks separate glass panels, and use steel belt fixed crates in container, make safety when sea transportation



Why we can finish so many laminated glass projects?

- 1) Select grade A float glass material with no chips zero bubbles zero scratches and perfect flat surface.
- 2) Our own advanced temper and laminate machine to guarantee our tempered laminated glass quality, with splendid temper stress uniformity, the self explosion rate reduce to 0.1%, use top 3 China brand PVB interlayer make sure zero delaminate on glass.
- 3) Strict quality control according to ISO9001, make sure accurate size, thickness, and process works when delivery.
- 4) Use customized strong plywood crates with corks separate and plastic film fully covered to guarantee safety and avoid breaking when sea transportation.
- 5) Fast respond for after-sales service, any problems will solve soon in around 12-72 hours.

Our professional tempered laminated glass production flow, every step will have professional people control quality seriously.