

## **Colorless 10mm tempered glass manufacturer in China**

Tempered glass is one of two kinds of safety glass regularly used in applications in which standard glass could pose a potential danger.(another safety glass is [laminated glass](#)).Tempered glass is four to five times stronger than standard glass and does not break into sharp shards when it fails.

Safety 10mm toughened glass is made by heating [10mm clear float glass](#)(flat).It is manufactured through a process of extreme heating and rapid cooling, making it harder than normal glass. It results in the outer skins under powerful compressive stress and the interior with severe tensile stress. In consequence, the impact applied to the glass will be overcome by the compressive stress on the surfaces to assure safety of use. It is ideal for areas with high wind loads and areas where human contacts are an important consideration.

### **Tempered glass characteristics:**

1. Strictly meet with building codes and safety requirements.
2. Strong enough to withstand high levels of thermal stress.
3. 4-5 times stronger than annealed glass of the same thickness.
4. Once breakage occurs, the glass disintegrates into small cubical fragments, which are relatively harmless to human body.
5. Sizes are produced as per customer request. once tempered, it can not be cut down.All work done must be done before tempering.
6. Can be printed with special logo and patterns with enamel silk screening.
7. Accept custom design,all kinds of shape,edge process and cutout.

### **Our tempered glass specification:**

Size: Maximum 3000\*8000mm, Minimum 150\*300mm.

Thickness: 3mm 4mm 5mm 6mm 8mm 10mm 12mm 15mm 19mm.

Color: clear, ultra clear, green, blue, grey, bronze, etc.

Processing: All the processing like beveling, cutting, drilling, etc. must be done before tempering.

### **Where to used tempered glass?**

- 1.Curtain wall.
- 2.Office partitions.
- 3.Sliding doors.
- 4.Shower door glass,bathroom partition.
- 5.Balustrades,fence, [canopy](#), handrail.
- 6.Shop display windows, showcases, display shelves.
- 7.Exhibition hall.
- 8.Furniture, table-top.
- 9.Shopfronts in offices,houses,shop.
- 10.many other applications.

### **Tempered glass quality:**

1. Meet standards ISO,CCC,CE,certification.
2. High strength and puer clean surface. Select 40% of high quality clear glass for tempering.
3. Superior work on edge treatment,cutout,drilling holes.

4. Strong multi-layer wooden board crate package.

**10mm clear tempered glass:**



**Tempered glass processing:**



**Safety tempered glass application:**



**Tempered glass warehouse and machine.**





**DECLARATION OF CONFORMITY**

Labtest Laboratory  
Certificate No.: LBTC1511230E

**EC Declaration of CPD Conformity**

The following product has been tested by Labtest Technology Laboratory Ltd, with the testing standards and found in conformity with the EC Council Directive of 89/105/EEC. It is possible to use CE marking to demonstrate the conformity with the CPD Directive.

Report No.: LBTC1511230E

Applicant: SHENZHEN SUN GLOBAL GLASS CO., LTD  
NO.84 FLOOR SIX BUILDING BUILDING BUILDING  
LONGGANG DISTRICT SHENZHEN GUANGDONG CHINA

Address: SHENZHEN SUN GLOBAL GLASS CO., LTD  
NO.84 FLOOR SIX BUILDING BUILDING BUILDING  
LONGGANG DISTRICT SHENZHEN GUANGDONG CHINA

Manufacturer: SHENZHEN SUN GLOBAL GLASS CO., LTD  
NO.84 FLOOR SIX BUILDING BUILDING BUILDING  
LONGGANG DISTRICT SHENZHEN GUANGDONG CHINA

Product: TEMPERED GLASS

Model No.: 8mm, 9mm, 10mm, 12mm, 15mm

Trade Mark: SGA

Test Standards: EN 12150-2:2004


The referred test reports show that the product complies with the essential requirements in the above listed standards. The applicant is authorized to use this certificate in connection with the EC declaration of CPD conformity according to the Directive.

**CE**

Labtest Technology Laboratory  
March 2015, No. 1511230E

This certificate of conformity is based on a single evaluation of the certified samples of the above mentioned product. It does not imply an assessment of the whole production and other relevant Directives have to be observed.

40 Shengyuan Road, Longgang District, Shenzhen, P.R. China  
Tel: No. 755-81230100 Fax: No. 755-81230101 Web: www.labtest.com

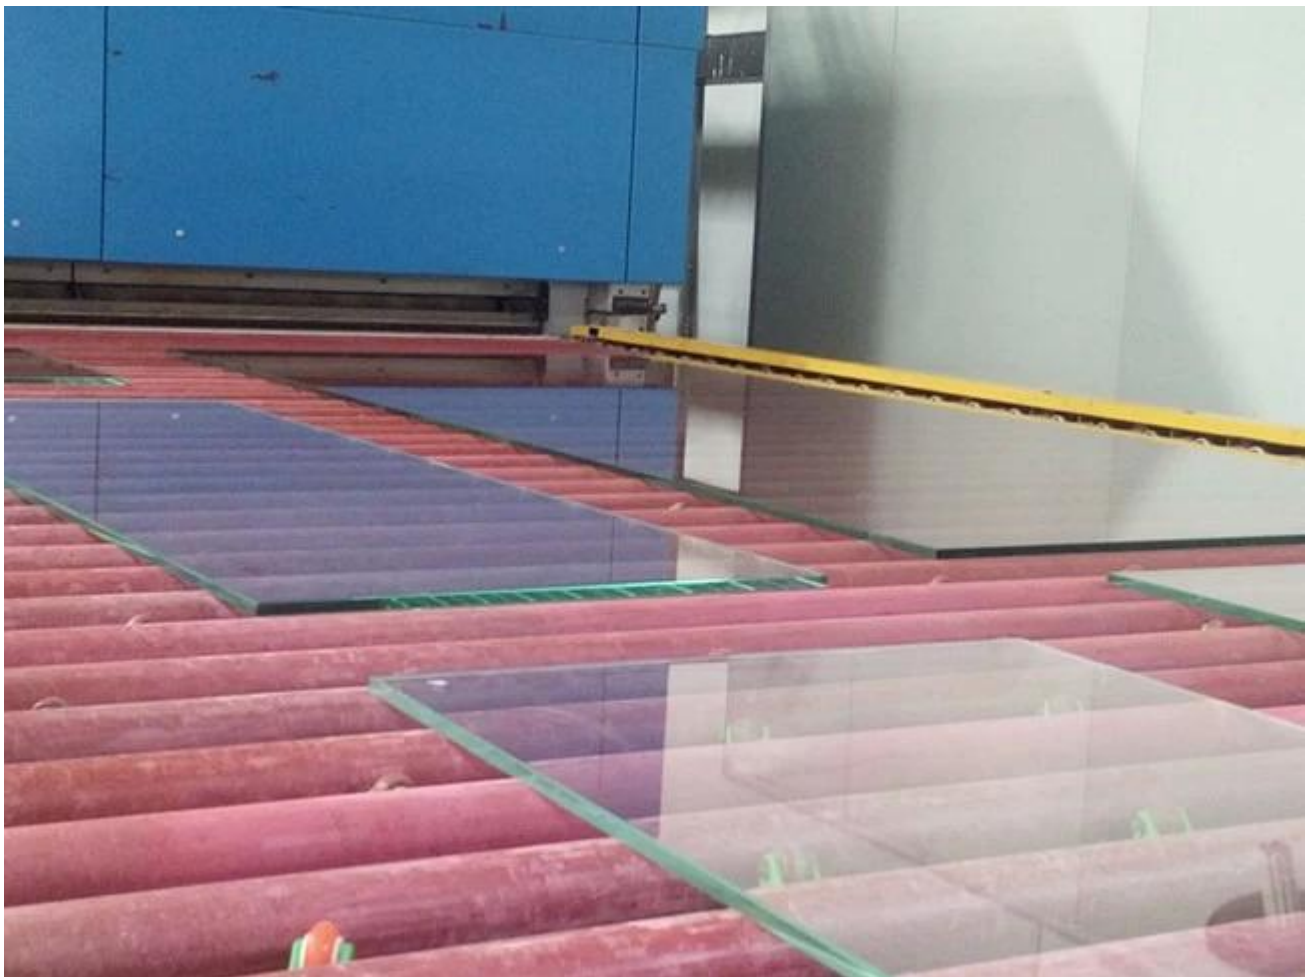

**Tempered glass strong packing and safety loading**

