



JIMY
Professional glass manufacturer

Shenzhen Jimy Glass Co., Ltd. is a leading company in value-added processing and wholesaling architectural glass. Our reputation is built on response, reliability and on time delivery from 1993.

Our pursuing:

- High quality
- Reasonable price
- Fast delivery time
- Long-term and win-win business

Our main products includes:

- ★ Tempered Glass / Heat Soaked Toughened Glass
- ★ Laminated Glass (PVB Laminated Glass, SGP Laminated Glass)

The main features of our glass products:

1. Our glass is passed the test and got the certificate of ISO, CE, SGCC, SGS, etc.;
2. Max size could reach to 3300*12000mm, any customized size could be produced;
3. All the materials we use to produce the processed glass is Grade A, to make sure the tempered glass self-explosion rate is lower than 0.1%, and the laminated glass won't have bubbles or delaminate, offer 15 years guarantee;
4. Control the precision very strictly, the tolerance for monolithic glass thickness is $\pm 0.2\text{mm}$, for size is $\pm 1\text{mm}$;
5. Drilling holes, cutouts, polished edges, beveled edges, ogee edges, all could be done perfectly;
6. There is cork or pearl wool between glass, which could make sure the glass won't scratch;
7. All the glass is packed in strong export plywood crate to avoid any broken during transportation;
8. We have independent quality inspection department, all the glass will be inspected in every production process, to make sure all the glass we ship out won't have any quality problem.

Our service:

1. Generally, the production time is 10-15 days after order is confirmed, if very urgent, we could do our best to finish it within 10 days;
2. We have professional engineers, could make the drawings with you together, to make sure all the glass come out is exactly what you demand;
3. We have long-term business relationship with many shipping companies like MSK/NYK/COSCO, could help you get competitive freight cost with fastest shipping time;
4. No matter which term (FOB/CNF/CIF/) we do, we will do the insurance and certificate of origin for you freely;
5. We will refund the payment or replace the glass for you in the fastest way if there is any broken or quality problem accidentally;
6. We have professional one-stop service team, could fulfill your any requirements at any time.

■ Some of the projects we have done



■ Our ongoing projects in 2018



MAIN PRODUCT INTRODUCTION

■ Our Tempered Glass

Tempered Safety Glass is fabricated by heating annealed glass to over 600°C and cooling it rapidly, which locks the outer surfaces of the glass in a state of high compression, and the core or center of the glass in compensating tension. It is a safety glass which is used when strength, thermal resistance and safety are important considerations.

Characteristic

- In the event of breakage, the particles are small and are relatively harmless compared with the sharp splinters resulting from the breakage of annealed glass.
- The toughening process also greatly reduces the risk of thermal breakage.
- Up to five times stronger than annealed glass of the same thickness, making it an ideal safety or security glass.
- Conforms to the requirements of BS6206:1981 Class A as well as European Standard BS EN 12150.
- Available in Clear, Tinted, Reflective, Low Iron, Etched, Textured, Colors-mart, Thermo-color and Low-E glass types.
- All work done on Toughened glass (beveling, cutting, drilling, etc.) must be done before tempering.


Processing

Edge work

An arrissed edge is the simplest type of edgework and consists of removing the sharp edges from “as cut” glass. Flat ground edges give a flat profile with smooth arris. A polished edge can be specified for exposed edges, e.g. in furniture.

Holes

Toughened glass can be supplied with drilled holes (no matter straight or conical). The diameter of holes should not be less than the thickness of the glass, the distance between the edges of a hole to the glass edge should not be less than twice the glass thickness, the distance of the edge of a hole to the corner of the glass should not be less than six times the glass thickness.

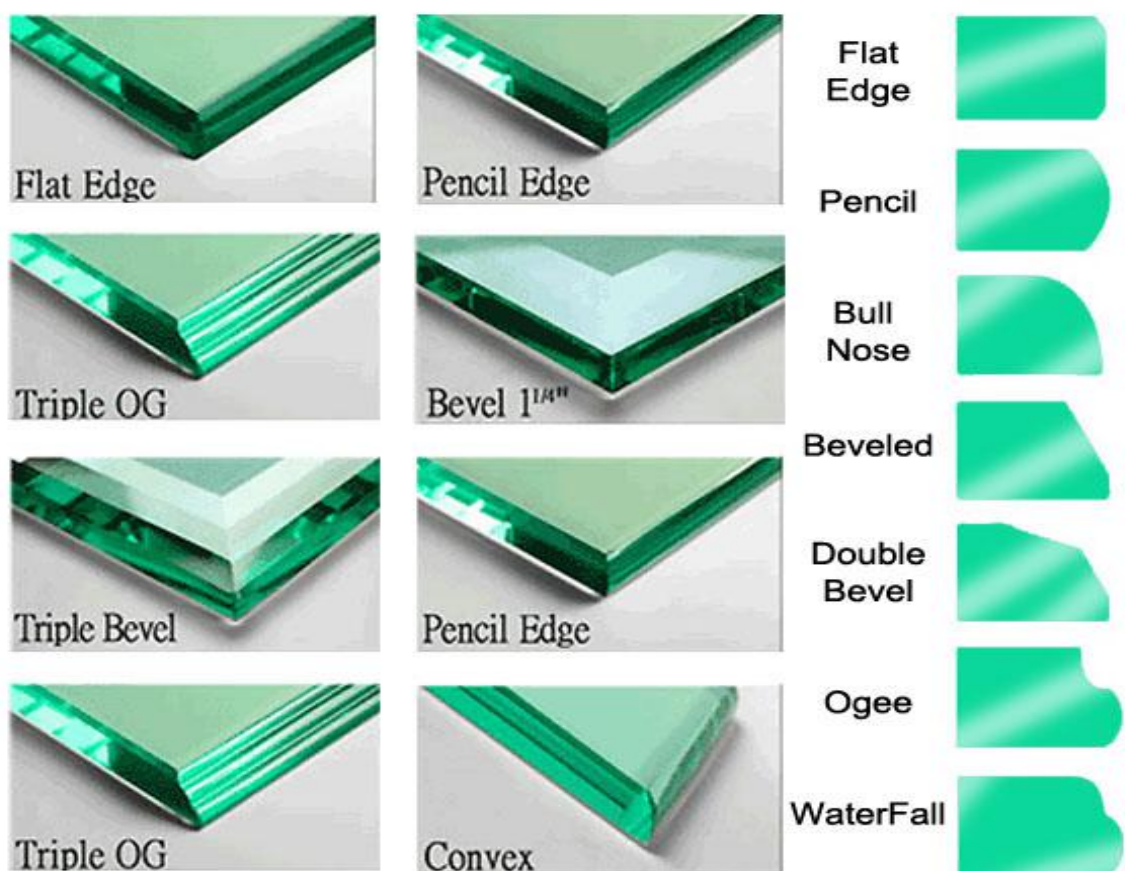

Shapes

Except rectangle, we also could do shape toughened glass, like round, Trapezoid, parallel, etc.

Other processing like acid etched, color painted, digital printing, pattern silkscreen, also could be done well.

Availability


Max Size for flat tempered glass 3300*12000mm, for curved tempered glass 2440x5500mm, mini radius 600mm, any customized size could be produced

Thickness: 4mm 5mm 6mm 8mm 10mm 12mm 15mm 19mm

Color: clear, ultra clear, green, blue, grey, bronze, etc.

Application

• Glass Balustrades • Glass skylight • Glass canopy • Shower Screens •
Glass shelves • Glass Doors And Windows • Furniture like table top and
cabinet doors • Many Others.

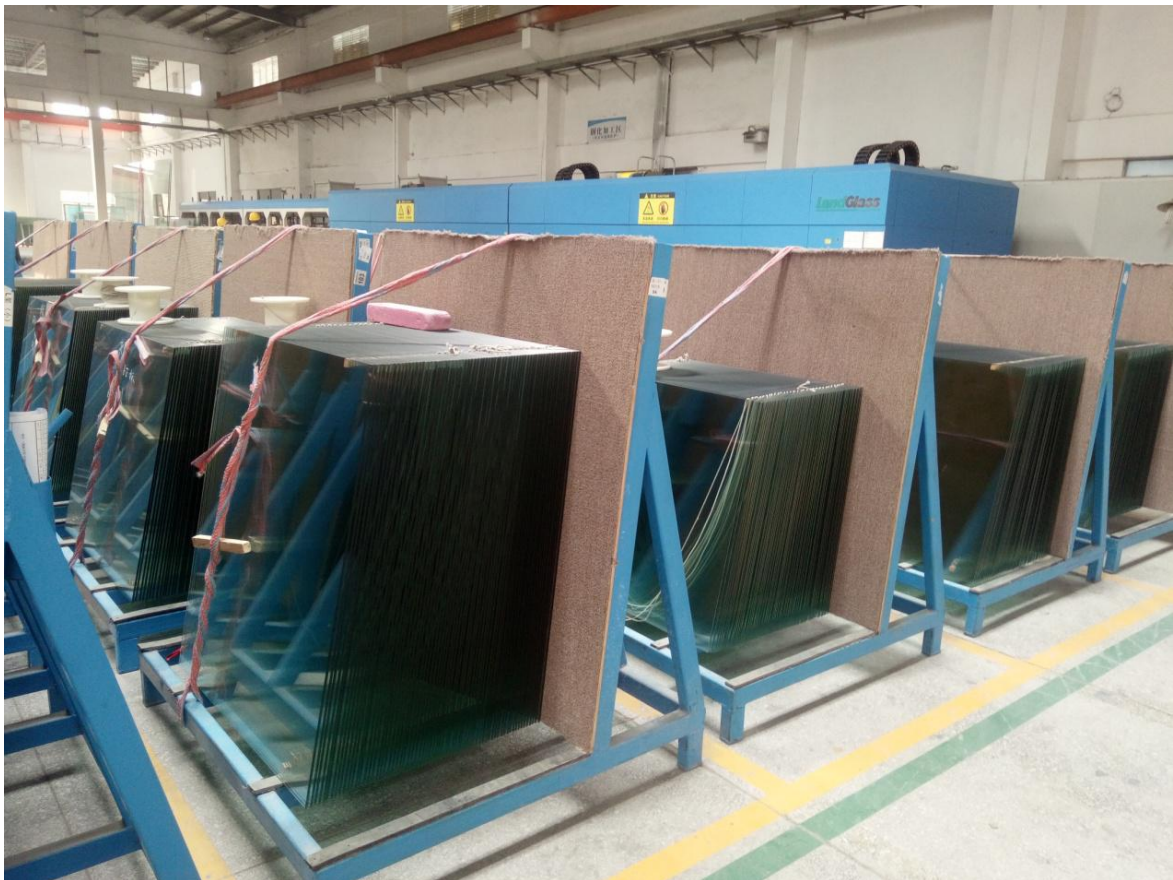





■ Our Laminated Glass

We have advanced customized laminating equipment and can provide a full range of annealed or toughened laminated glass in Clear, Tinted, Reflective, Low Iron, Etched, Mirrored, Textured, Color-smart, Thermo-color and Low E combinations.

Laminated Glass is made up of two or more layers of glass permanently bonded together with an interlayer (PVB / SGP / EVA) via a controlled, highly pressurized and industrial heating process. The lamination process results in the glass panels holding together in the event of breakage, reducing the risk of harm. Laminated Glass is classified as Grade A Safety Glass. There is several laminated glass types manufactured using

different glass and interlayer options that produce a variety of strength and security requirements.

Characteristic

- **Safety:** When laminated glass is attacked by outside force, it hard to be penetrated because interlayer film has strong tenacity and can absorb and weaken a mass of striking energy. Even if it's broken, the splinters will stick to the interlayer and not scatter.
- **Sound Insulation:** the interlayer film can effectively prevent sound wave.
- **Anti-UV:** Laminated glass interlayer film can effectively present UV.
- **Dynamic colors:** Color laminated glass offers total flexibility, providing the personal touch for unique colors and aesthetics, also affords different levels of translucency for visual screening.

Availability

Max Size for flat laminated glass 3300*12000mm, for curved tempered laminated glass 2440x5500mm, mini radius 600mm, any customized size could be produced

Monolithic glass thickness: 3mm 4mm 5mm 6mm 8mm 10mm 12mm 15mm 19mm

Glass color: clear, ultra clear, grey, green, blue, bronze


Interlayer: 0.38mm and multiple of 0.38 mm PVB or EVA, 0.89mm
1.52mm 2.28mm SGP

Interlayer color: red, white, yellow, any pantone color

Processing: drill holes, cut notches, polished edges, sandblasting, screen printing, etc., all could be done perfectly

Application


- Sloped/Overhead Glazing - Museums, Prisons, Government Buildings
- Safety Glazing Applications - Jewelry Stores, Banks, Airports
- Interior Partitions, Office facades, flooring - Schools, Hospitals, Hotels
- Many Others.

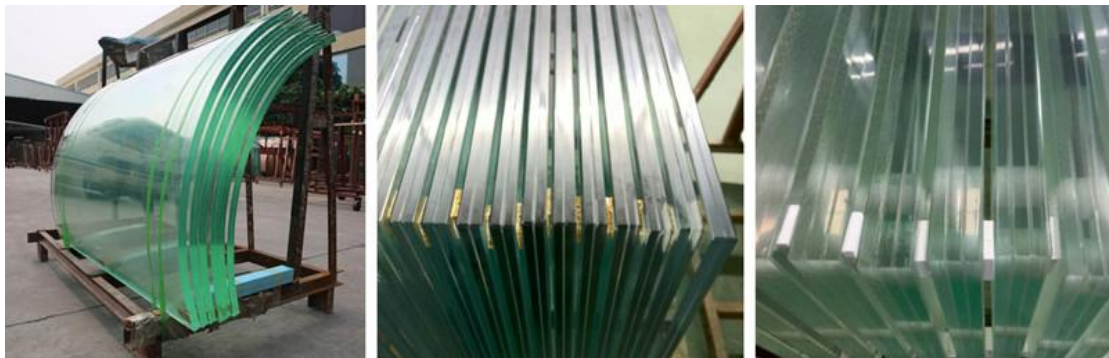



■ Our Packaging and loading:

Fresh new strong export plywood crates

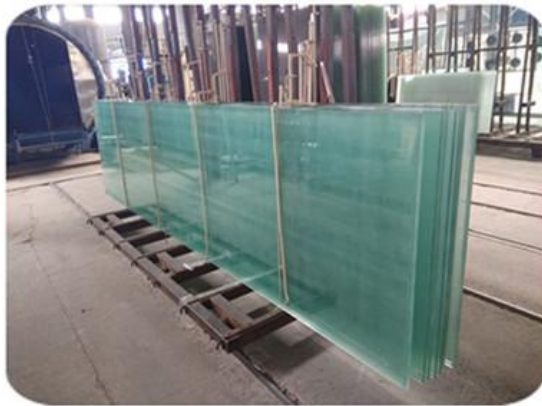

■ Our workshop



■ For more details, please contact:

Eileen Huang

Email: eileen@jimyglass.com

Tel: 0086-755-28211334

Fax: 0086-755-89340850

CEL(Whatsapp): 0086-13662630556

Website: www.glassmanufacturerchina.com