

SGP and PVB are used in various applications, including skylights, canopies, and walkways.

- SGP is used in skylights, canopies, and walkways
- PVB is used in skylights, canopies, and walkways
- SGP is used in canopies, walkways, and skylights
- PVB is used in walkways, canopies, and skylights


Performance data

Material	SGP	PVB	Standard
Density (g/cm ³)	0.95	1.07~1.08	ASTM D-792
Coefficient of linear expansion (°C ⁻¹)	10~15x10 ⁻⁵ (-20°C ~32 °C)	4x10 ⁻⁴	ASTM D-696
Tensile strength (Mpa)	34.5	20	ASTM D-638
Tear strength (Tear energy) (MJ/m ³)	50	10-15	ASTM D-638
CSS (Mpa)	>20.7		Du Pont
Elongation (%)	400	275 (ASTM D-412)	ASTM D-638
HDT @ 66 PSI	43°C		ASTM D-696
Haze	<2%	<2	
YID %	<2.5	10-15	(interlayer)
Refractive index	1.5	1.47~1.5	
UV cutoff wavelength (nm)	310	380	
UV screening (%) 3C+0.38+3C	99.98	99.98	


SGP and PVB are used in various applications, including skylights, canopies, and walkways.



Laminated Glass with
SGP Interlayer

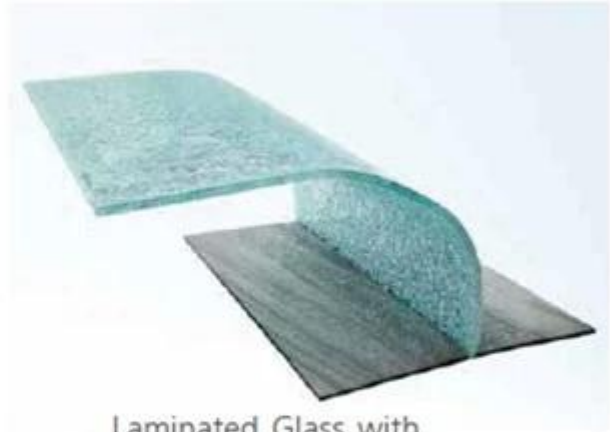

Laminated Glass with
PVB Interlayer

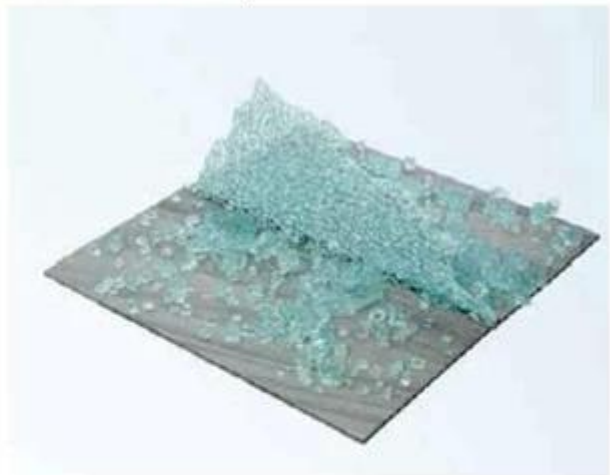

Tempered Glass

□□□□□□ □□□□□□ □□□ □□□□ □□□□□□□□□□



□□□□□ □□□□□ □□ □□□ □□□□□□ □□□□□□

